

www.cmdrive.cn

交流永磁同步 伺 服 电 机

 南京川木电机有限公司
Nanjing Chuanmu Motor Co., Ltd.

 江苏省南京溧水区和凤溧水高新投资产业园

 025-56600068

 www.cmdrive.com

V3.0
由于本公司持续的产品升级造成的内容变更，恕不另行通知
版权所有©南京川木电机有限公司
Copyright©Nanjing Chuanmu Motor Co., Ltd.

 南京川木电机有限公司
Nanjing Chuanmu Motor Co., Ltd.



为工业提供更强劲永磁芯

公司介绍 Company Introduction

南京川木电机有限公司专注于工业自动化产品的应用与开发，稀土永磁同步伺服电机、直驱力矩电机是公司核心产品，在自主研发核心部件的支撑下，公司从一个单一的零部件供应商逐步向提供整套运动控制系统解决方案进行战略转型，主要涉及橡胶注塑、压铸、液压机、铝型材、纺织、机械切削加工设备、冷轧设备、开卷校平设备、剪折设备、转塔冲床、锻压机床、吊装设备、新能源、线缆加工设备等多行业多领域。

公司产品性能稳定，以客户为中心，为客户提供优质服务；追求技术领先，持续提升核心竞争力；推行全面质量管理，打造行业精品；为跻身国际优秀的工控设备供应商而不懈努力。

行业定制化伺服电机开发是公司的优势业务范围，特殊定制响应快，周期短。


Nanjing Chuanmu Motor Co., Ltd. focuses on the application and development of industrial automation products. Rare earth permanent magnet synchronous servo motors and direct drive torque motors are the company's core products. With the support of independent research and development of core components, the company has gradually transformed from a single component supplier to providing a complete set of motion control system solutions, mainly involving rubber injection molding, die-casting, hydraulic presses, aluminum profiles, textiles, mechanical cutting equipment, cold rolling equipment, unwinding and leveling equipment, shearing and folding equipment, turret punching machines, forging machines, lifting equipment, new energy, cable processing equipment and other industries and fields.

The company's products have stable performance and are customer-centric, providing high-quality services to customers; Pursuing technological leadership and continuously enhancing core competitiveness; Promote comprehensive quality management and create industry excellence; Make unremitting efforts to become an excellent international industrial control equipment supplier.

Industry customized servo motor development is the company's advantageous business scope, with fast response and short cycle for special customization.

- ① 全新IPM永磁同步伺服电机采用一体化成型的电机外壳，电机散热好温升低，整体外观美观，紧凑，大气。
- ② 采用先进的电磁设计技术，实现更高的转矩密度，更小的定子气隙，高槽满率，电机体积更小，过载能力强，可控性能好，响应快。
- ③ 磁阻转矩的有效利用使其在相同转矩下具有更小的运行电流，电机和控制器损耗小，系统效率显著提升。
- ④ 采用先进的控制技术和转子磁极优化设计技术，磁场谐波畸变率低，转矩脉动和齿槽效应更小，电机旋转更加平稳，振动噪声更小。
- ⑤ 采用内嵌高性能钕铁硼永磁材料结构，具有更小的损耗和更低温升，配合内置温控器过热保护，伺服电机永不退磁。


SE	18	02	150	4	R	E	B	1	F	D
系列代号	电机止口规格	规格特征	电机转速	电压等级	反馈元件	是否带制动	安装方式	安装方式	冷却方式	特殊标记
SE	18: 180mm	1	050: 500rpm	2: 220V	R:旋变	E:不带	B:带键	1:法兰安装	F:风冷	
ME	25: 250mm	2	150: 1500rpm	4: 380V	F:光电	B:带制动	Y:光轴	2:地脚安装	W:液冷	
DZ	35: 350mm	3	170: 1700rpm	6: 660V	E:绝对值		S:花键	3:立式向下安装	X:自冷	
	45: 450mm		200: 2000rpm		N:无编码器			4:立式向上安装		
.....								5:法兰+地脚安装		

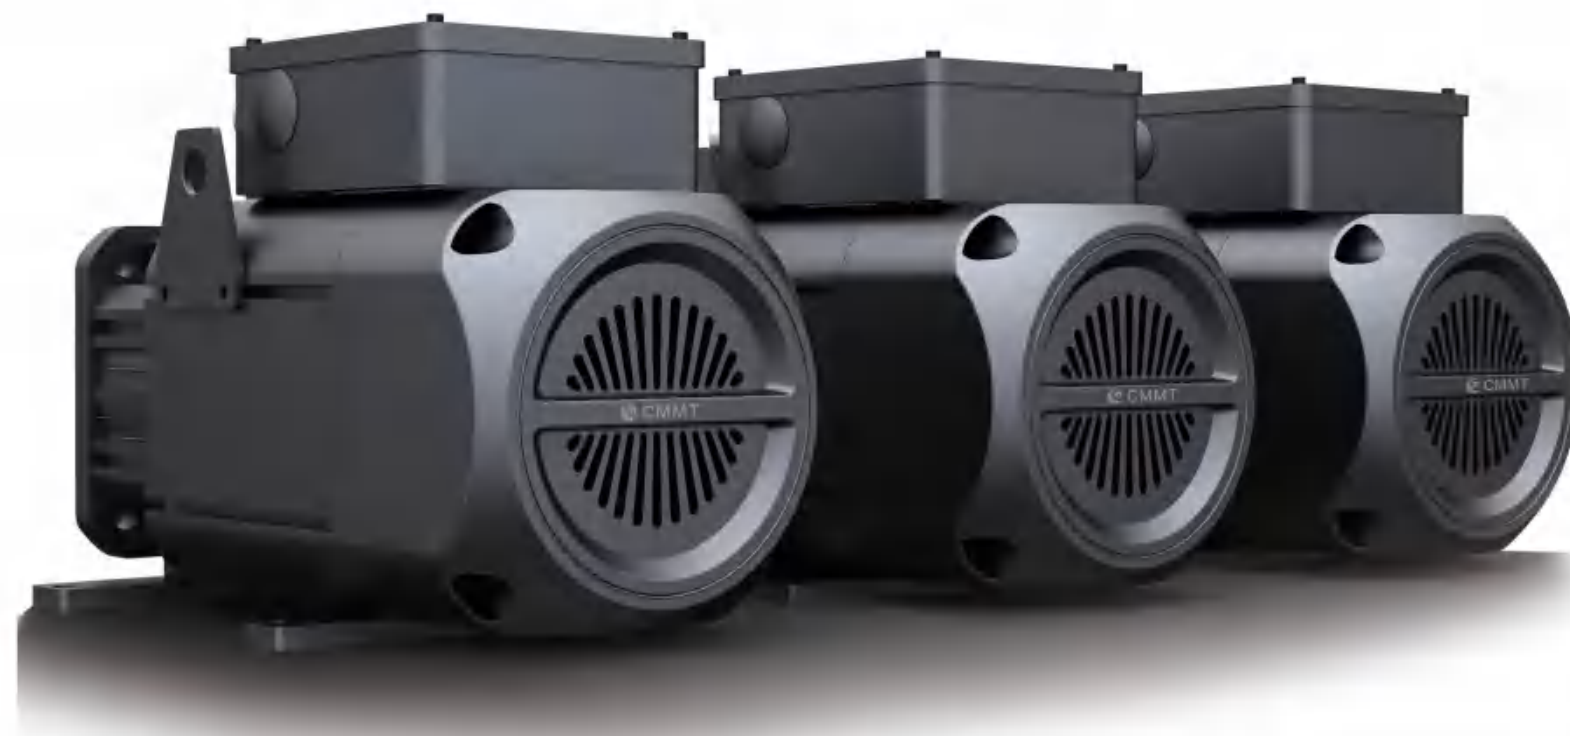


型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
SE1803100	40	1000	1300	7.6	4.2	5.29	304	380	66.7	76	83	47.1
SE1804100	53	1000	1300	10.0	5.5	5.31	305	380	66.7	101	110	53.8
SE1805100	63	1000	1300	11.8	6.6	5.33	306	380	66.7	126	137	60.5
SE1806100	73	1000	1300	13.6	7.6	5.37	308	380	66.7	146	164	67.2
SE1807100	84	1000	1300	15.7	8.8	5.35	307	380	66.7	168	191	74.8
SE1808100	96	1000	1300	18.1	10.1	5.31	305	380	66.7	192	218	81.5
SE1809100	107	1000	1300	19.8	11.2	5.4	310	380	66.7	214	245	88.2
SE1810100	126	1000	1300	23.3	13.2	5.4	310	380	66.7	252	272	94.9
SE1812100	147	1000	1300	27.3	15.4	5.38	309	380	66.7	279	326	109.2
SE1814100	163	1000	1300	29.2	17.1	5.59	321	380	66.7	310	380	122.6
SE1816100	175	1000	1300	31.3	18.3	5.59	321	380	66.7	333	434	136
SE1818100	200	1000	1300	36.4	20.9	5.49	315	380	66.7	380	488	149.4
SE1803150	40	1500	2000	12.1	6.3	3.3	305	380	100	76	83	47.1
SE1804150	53	1500	2000	16.1	8.3	3.29	300	380	100	101	110	53.8
SE1805150	63	1500	2000	19.1	9.9	3.29	300	380	100	126	137	60.5
SE1806150	73	1500	2000	22.1	11.5	3.3	301	380	100	146	164	67.2
SE1807150	84	1500	2000	25.4	13.2	3.31	302	380	100	168	191	74.8
SE1808150	96	1500	2000	28.9	15.1	3.32	303	380	100	192	218	81.5
SE1809150	107	1500	2000	32.4	16.8	3.3	301	380	100	214	245	88.2
SE1810150	126	1500	2000	38.3	19.8	3.29	300	380	100	252	272	94.9
SE1812150	147	1500	2000	43.6	23.1	3.37	306	380	100	279	326	109.2
SE1814150	163	1500	2000	48.1	25.6	3.39	308	380	100	310	380	122.6
SE1816150	175	1500	2000	53.8	27.5	3.25	297	380	100	333	434	136
SE1818150	200	1500	2000	59.3	31.4	3.37	306	380	100	380	488	149.4

型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
SE1803170	40	1700	2200	13.1	7.1	3.05	303	380	113.3	76	83	47.1
SE1804170	53	1700	2200	17.8	9.4	2.98	307	380	113.3	101	110	53.8
SE1805170	63	1700	2200	21.3	11.2	2.96	306	380	113.3	126	137	60.5
SE1806170	73	1700	2200	23.9	13.0	3.05	305	380	113.3	146	164	67.2
SE1807170	87	1700	2200	28.5	15.5	3.05	305	380	113.3	174	191	74.8
SE1808170	96	1700	2200	32.4	17.1	2.96	304	380	113.3	192	218	81.5
SE1809170	110	1700	2200	35.0	19.6	3.14	314	380	113.3	220	245	88.2
SE1810170	126	1700	2200	40.9	22.4	3.08	307	380	113.3	252	272	94.9
SE1812170	147	1700	2200	48.0	26.2	3.06	307	380	113.3	279	326	109.2
SE1814170	163	1700	2200	52.4	29.0	3.11	313	380	113.3	310	380	122.6
SE1816170	175	1700	2200	59.5	31.2	2.94	306	380	113.3	333	434	136
SE1818170	200	1700	2200	66.2	35.6	3.02	306	380	113.3	380	488	149.4
SE1803200	40	2000	2500	15.7	8.4	2.55	308	380	133.3	76	83	47.1
SE1804200	52	2000	2500	21.4	10.9	2.43	298	380	133.3	99	110	53.8
SE1805200	63	2000	2500	24.1	13.2	2.61	305	380	133.3	126	137	60.5
SE1806200	73	2000	2500	29.3	15.3	2.49	308	380	133.3	146	164	67.2
SE1807200	84	2000	2500	32.7	17.6	2.57	312	380	133.3	168	191	74.8
SE1808200	96	2000	2500	37.6	20.1	2.55	310	380	133.3	192	218	81.5
SE1809200	107	2000	2500	41.0	22.4	2.61	316	380	133.3	214	245	88.2
SE1810200	126	2000	2500	48.3	26.4	2.61	316	380	133.3	252	272	94.9
SE1812200	147	2000	2500	57.6	30.8	2.55	311	380	133.3	279	326	109.2
SE1814200	163	2000	2500	63.4	34.1	2.57	312	380	133.3	310	380	122.6
SE1816200	175	2000	2500	66.5	36.6	2.63	319	380	133.3	333	434	136
SE1818200	200	2000	2500	75.5	41.9	2.65	321	380	133.3	380	488	149.4

◆外形安装尺寸图（风冷）

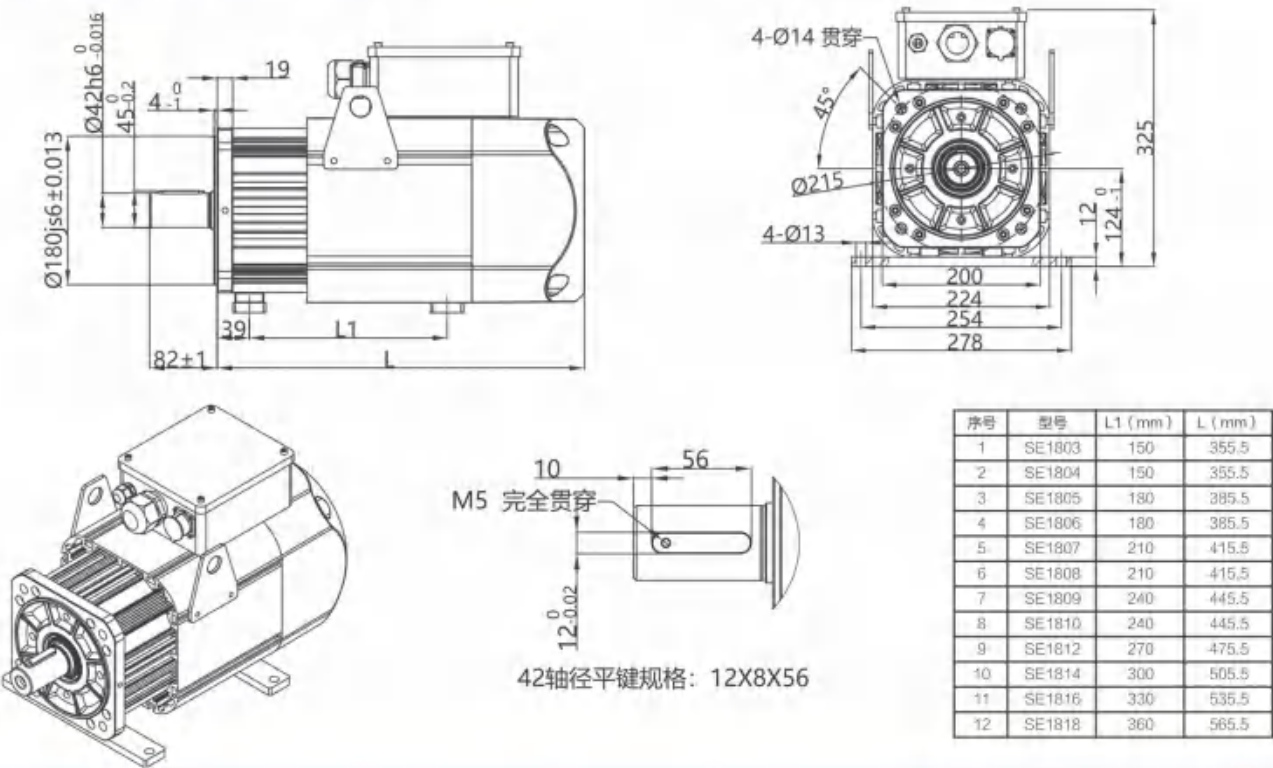




◆外形安装尺寸图（液冷）

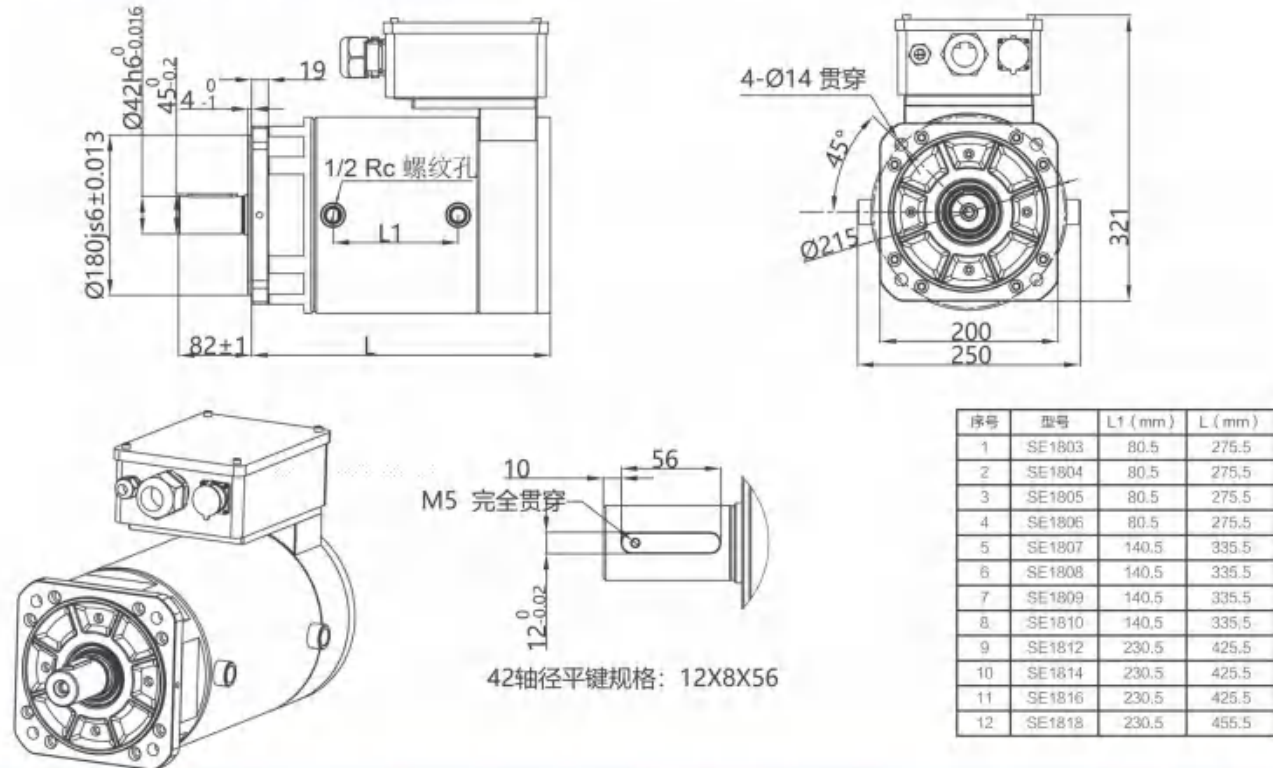

型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
SE2506100	161	1000	1300	28.8	16.9	5.5	320	380	66.7	255	330	282.7
SE2508100	224	1000	1300	37.6	23.5	5.96	341	380	66.7	340	440	360.4
SE2510100	278	1000	1300	49.6	29.1	5.6	320	380	66.7	424	550	438.1
SE2512100	340	1000	1300	61.2	35.6	5.56	318	380	66.7	508	660	515.8
SE2514100	375	1000	1300	65.3	39.3	5.74	328	380	66.7	593	770	593.5
SE2516100	425	1000	1300	75.9	44.5	5.6	320	380	66.7	678	880	671.2
SE2518100	475	1000	1300	85.7	49.7	5.54	317	380	66.7	763	990	755.5
SE2520100	525	1000	1300	90.5	55.0	5.8	332	380	66.7	848	1100	833.2
SE2522100	583	1000	1300	103.6	61.0	5.63	322	380	66.7	932	1210	910.9
SE2524100	636	1000	1300	110.8	66.6	5.74	328	380	66.7	1016	1320	988.6
SE2506150	161	1500	2000	42.6	25.4	3.78	343	380	100	255	330	282.7
SE2508150	224	1500	2000	59.7	33.8	3.75	341	380	100	340	440	360.4
SE2510150	278	1500	2000	71.6	42.1	3.88	352	380	100	424	550	438.1
SE2512150	340	1500	2000	87.6	50.3	3.88	352	380	100	508	660	515.8
SE2514150	375	1500	2000	97.4	59.4	3.85	350	380	100	593	770	593.5
SE2516150	425	1500	2000	109.5	67.2	3.88	352	380	100	678	880	671.2
SE2518150	475	1500	2000	125.3	74.6	3.79	344	380	100	763	990	755.5
SE2520150	525	1500	2000	135.3	83.2	3.88	352	380	100	848	1100	833.2
SE2522150	583	1500	2000	163.8	91.6	3.56	323	380	100	932	1210	910.9
SE2524150	636	1500	2000	163.9	99.9	3.88	352	380	100	1016	1320	988.6




型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
SE2506170	161	1700	2200	48.8	28.7	3.3	339	380	113.3	255	330	282.7
SE2508170	224	1700	2200	72.0	39.9	3.11	329	380	113.3	340	440	360.4
SE2510170	278	1700	2200	89.1	49.5	3.12	325	380	113.3	424	550	438.1
SE2512170	340	1700	2200	107.6	60.5	3.16	329	380	113.3	508	660	515.8
SE2514170	375	1700	2200	118.3	66.8	3.17	335	380	113.3	593	770	593.5
SE2516170	425	1700	2200	126.5	75.7	3.36	329	380	113.3	678	880	671.2
SE2518170	475	1700	2200	148.4	84.6	3.2	339	380	113.3	763	990	755.5
SE2520170	525	1700	2200	162.0	93.5	3.24	342	380	113.3	848	1100	833.2
SE2522170	583	1700	2200	182.2	103.8	3.2	339	380	113.3	932	1210	910.9
SE2524170	636	1700	2200	204.5	113.2	3.11	329	380	113.3	1016	1320	988.6
SE2506200	161	2000	2500	59.2	33.7	2.72	329	380	133.3	255	330	282.7
SE2508200	224	2000	2500	78.6	46.9	2.85	344	380	133.3	340	440	360.4
SE2510200	278	2000	2500	101.1	58.2	2.75	332	380	133.3	424	550	438.1
SE2512200	340	2000	2500	125.0	71.2	2.72	329	380	133.3	508	660	515.8
SE2514200	375	2000	2500	137.9	78.5	2.72	329	380	133.3	593	770	593.5
SE2516200	425	2000	2500	149.1	89.0	2.85	344	380	133.3	678	880	671.2
SE2518200	475	2000	2500	181.3	99.5	2.62	318	380	133.3	763	990	755.5
SE2520200	525	2000	2500	180.4	109.9	2.91	352	380	133.3	848	1100	833.2
SE2522200	583	2000	2500	204.6	122.1	2.85	344	380	133.3	932	1210	910.9
SE2524200	636	2000	2500	233.8	133.2	2.72	329	380	133.3	1016	1320	988.6

◆外形安装尺寸图（风冷）

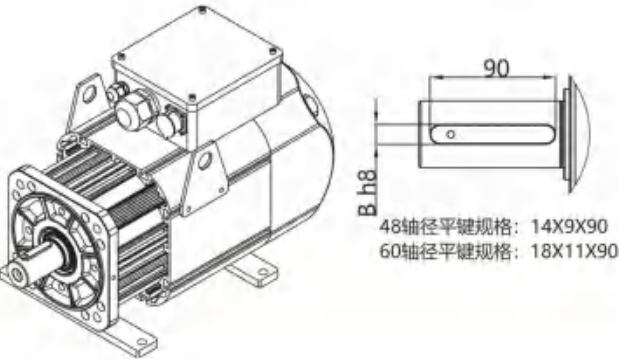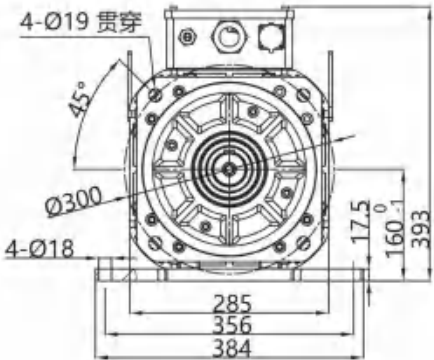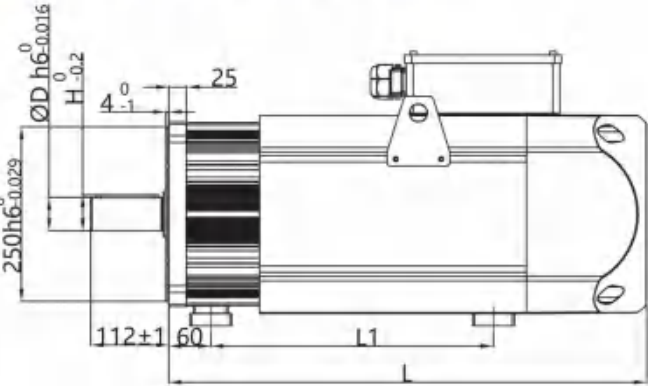

序号	型号	D (mm)	H (mm)	B (mm)	L1 (mm)	L (mm)
1	SE2506	48	51.5	14	195	474.5
2	SE2508	48	51.5	14	230	509.5
3	SE2510	48	51.5	14	265	544.5
4	SE2512	48	51.5	14	300	579.5
5	SE2514	48	51.5	14	335	614.5
6	SE2516	48	51.5	14	370	649.5
7	SE2518	60	64	18	405	684.5
8	SE2520	60	64	18	440	719.5
9	SE2522	60	64	18	475	754.5
10	SE2524	60	64	18	510	789.5

◆外形安装尺寸图（液冷）

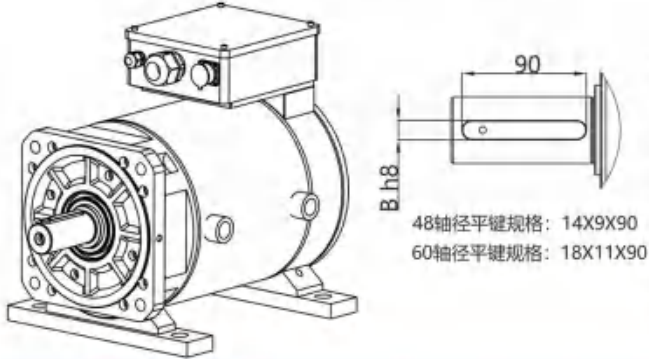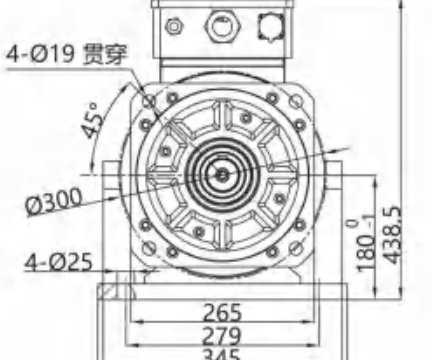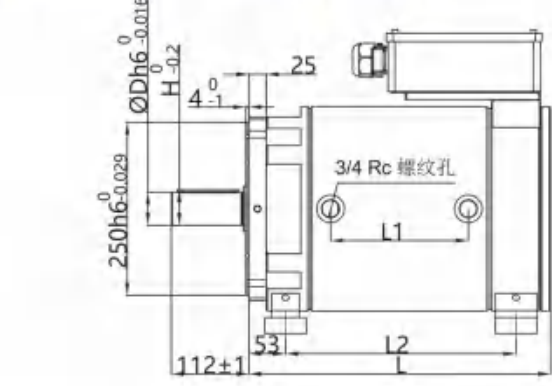


序号	型号	D (mm)	H (mm)	B (mm)	L1 (mm)	L2 (mm)	L (mm)
1	SE2506	48	51.5	14	129	263	366
2	SE2508	48	51.5	14	129	263	366
3	SE2510	48	51.5	14	199	333	436
4	SE2512	48	51.5	14	199	333	436
5	SE2514	48	51.5	14	268	403	506
6	SE2516	48	51.5	14	268	403	506
7	SE2518	60	64	18	339	473	576
8	SE2520	60	64	18	339	473	576
9	SE2522	60	64	18	409	543	646
10	SE2524	60	64	18	409	543	646


型号规格	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DE3504100	600	960	1000	1300	109	62.8	5.53	350	380	100	1610
DE3505100	750	1200	1000	1300	139	78.5	5.41	342	380	100	2002
DE3506100	900	1440	1000	1300	167	94.2	5.41	342	380	100	2394
DE3507100	1050	1680	1000	1300	193	109.9	5.46	346	380	100	2786
DE3508100	1200	1920	1000	1300	209	125.6	5.74	365	380	100	3178
DE3509100	1350	2160	1000	1300	250	141.3	5.41	342	380	100	3570
DE3510100	1500	2400	1000	1300	278	157	5.41	342	380	100	3962
DE3511100	1650	2640	1000	1300	312	172.7	5.29	334	380	100	4354
DE3512100	1800	2880	1000	1300	315	188.4	5.74	365	380	100	4746
DE3504120	600	960	1200	1500	131	75.4	4.59	347	380	120	1610
DE3505120	750	1200	1200	1500	167	94.2	4.51	342	380	120	2002
DE3506120	900	1440	1200	1500	193	113	4.66	356	380	120	2394
DE3507120	1050	1680	1200	1500	227	131.9	4.63	352	380	120	2786
DE3508120	1200	1920	1200	1500	251	150.7	4.78	365	380	120	3178
DE3509120	1350	2160	1200	1500	312	169.6	4.33	329	380	120	3570
DE3510120	1500	2400	1200	1500	313	188.4	4.8	365	380	120	3962
DE3511120	1650	2640	1200	1500	357	207.2	4.63	352	380	120	4354
DE3512120	1800	2880	1200	1500	416	226.1	4.33	329	380	120	4746

型号规格	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DE3504150	600	960	1500	1900	166	94.2	3.62	343	380	150	1610
DE3505150	750	1200	1500	1900	208	117.8	3.61	342	380	150	2002
DE3506150	900	1440	1500	1900	250	141.3	3.61	342	380	150	2394
DE3507150	1050	1680	1500	1900	280	164.9	3.75	360	380	150	2786
DE3508150	1200	1920	1500	1900	313	188.4	3.84	364.5	380	150	3178
DE3509150	1350	2160	1500	1900	360	212	3.75	364.5	380	150	3570
DE3510150	1500	2400	1500	1900	417	235.5	3.6	337.5	380	150	3962
DE3511150	1650	2640	1500	1900	418	259.1	3.95	377	380	150	4354
DE3512150	1800	2880	1500	1900	500	282.6	3.61	342	380	150	4746
DE3504170	600	960	1700	2200	192	106.8	3.13	337	380	170	1610
DE3505170	750	1200	1700	2200	229	133.5	3.28	355	380	170	2002
DE3506170	900	1440	1700	2200	278	160.1	3.25	349	380	170	2394
DE3507170	1050	1680	1700	2200	314	186.8	3.35	357	380	170	2786
DE3508170	1200	1920	1700	2200	360	213.5	3.35	262	380	170	3178
DE3509170	1350	2160	1700	2200	417	240.2	3.25	348	380	170	3570
DE3510170	1500	2400	1700	2200	500	266.9	3	323	380	170	3962
DE3511170	1650	2640	1700	2200	501	293.6	3.3	355	380	170	4354
DE3512170	1800	2880	1700	2200	625	320.3	2.89	310	380	170	4746

◆外形安装尺寸图（风冷）

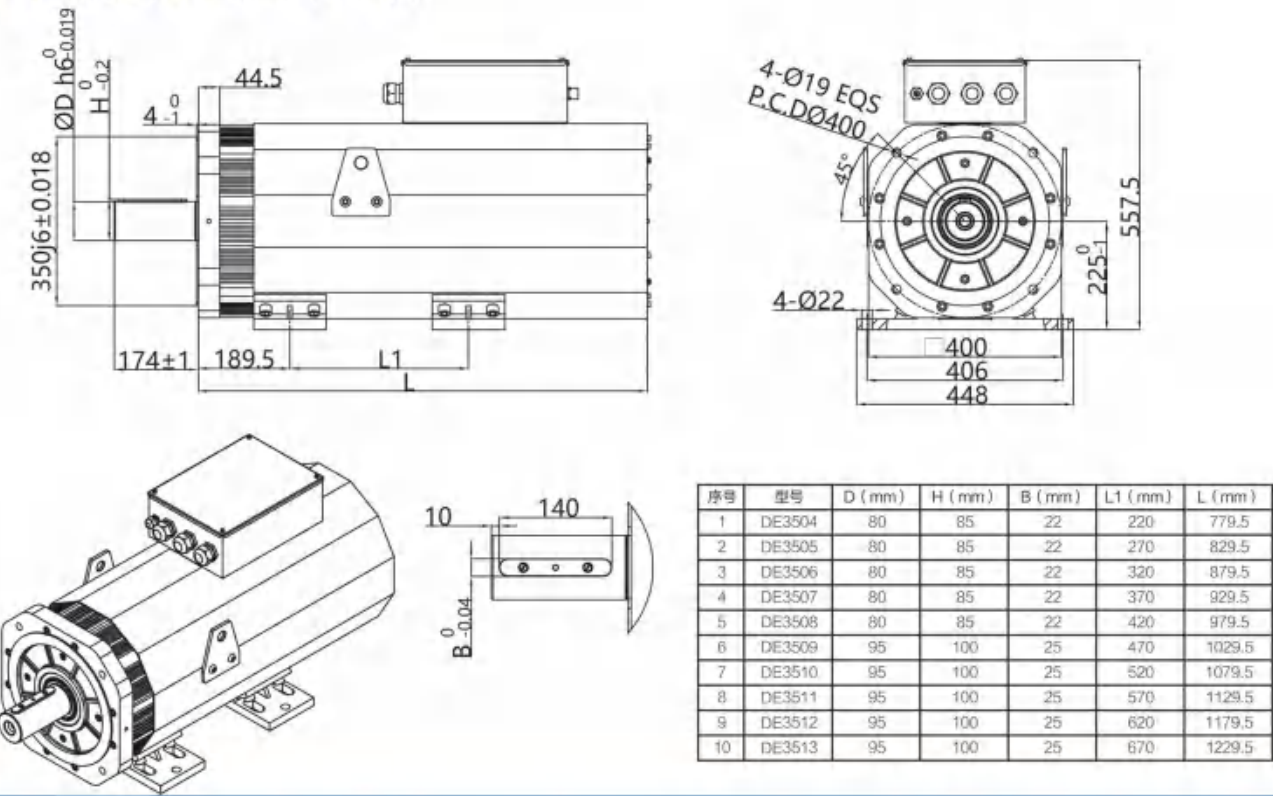


◆外形安装尺寸图（液冷）

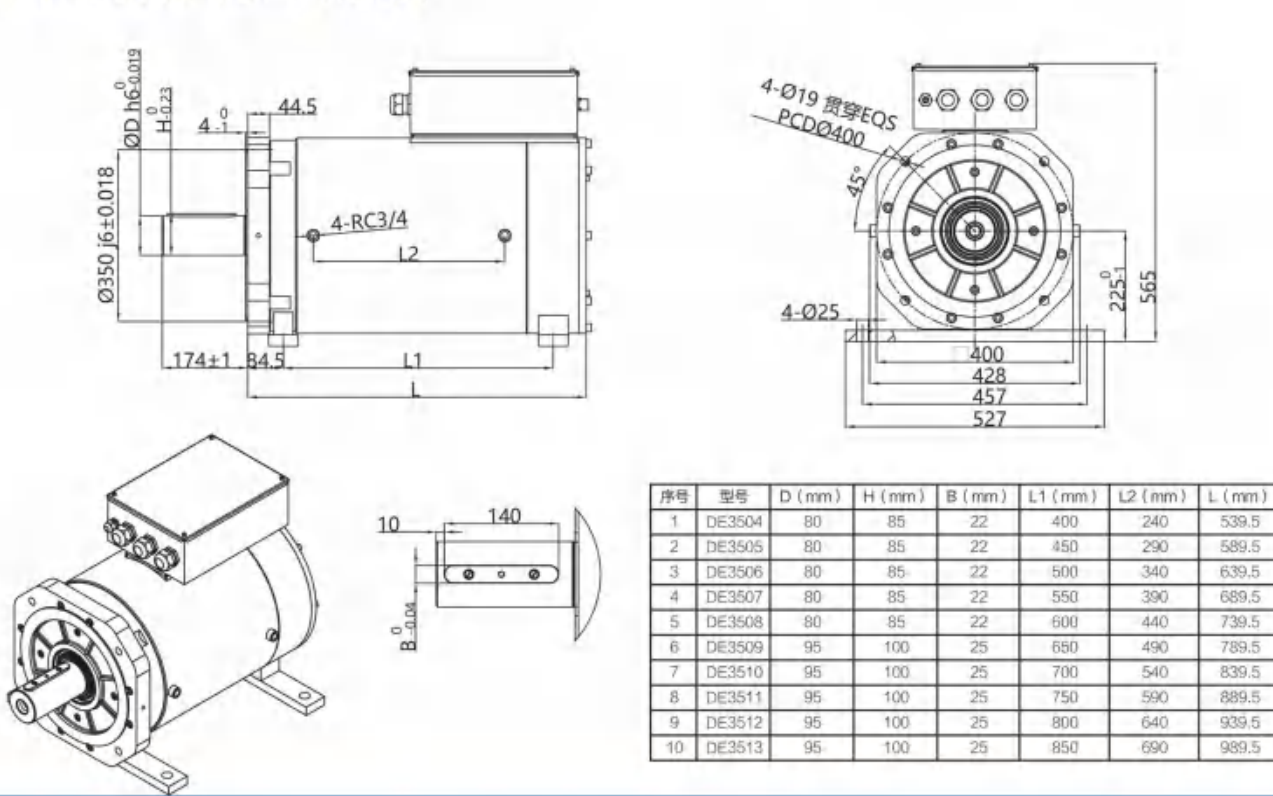

DE 45 系列
永磁同步伺服电机（液冷）

型号规格	额定转矩 (N·m)	额定转速下最大转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DE4504075	1200	1800	750	975	168.3	94.2	7.13	310	380	75	7419
DE4505075	1500	2250	750	975	213.1	117.8	7.04	306	380	75	8774
DE4506075	1800	2700	750	975	258.2	141.4	6.97	303	380	75	10129
DE4507075	2100	3150	750	975	294.5	164.9	7.13	310	380	75	11484
DE4508075	2400	3600	750	975	339.0	188.5	7.08	308	380	75	12839
DE4509075	2700	4050	750	975	378.7	212.0	7.13	305	380	75	14194
DE4510075	3000	4500	750	975	427.4	235.6	7.02	310	380	75	15549
DE4511075	3300	4950	750	975	462.2	259.2	7.14	310	380	75	16904
DE4512075	3600	5400	750	975	504.9	282.7	7.13	315	380	75	18259
DE4504100	1200	1800	1000	1300	224.3	125.7	5.35	315	380	100	7419
DE4505100	1500	2250	1000	1300	284.1	157.1	5.28	311	380	100	8774
DE4506100	1800	2700	1000	1300	338.3	188.5	5.32	313	380	100	10129
DE4507100	2100	3150	1000	1300	396.2	219.9	5.3	312	380	100	11484
DE4508100	2400	3600	1000	1300	454.5	251.3	5.28	311	380	100	12839
DE4509100	2700	4050	1000	1300	511.4	282.7	5.28	311	380	100	14194
DE4510100	3000	4500	1000	1300	557.6	314.1	5.38	317	380	100	15549
DE4511100	3300	4950	1000	1300	601.1	345.5	5.49	310	380	100	16904
DE4512100	3600	5400	1000	1300	679.2	377.0	5.3	315	380	100	18259
DE4504150	1200	1800	1500	1900	337.1	188.5	3.56	320	380	150	7419
DE4505150	1500	2250	1500	1900	432.3	235.6	3.47	312	380	150	8774
DE4506150	1800	2700	1500	1900	505.6	282.7	3.56	320	380	150	10129
DE4507150	2100	3150	1500	1900	585.0	329.8	3.59	323	380	150	11484
DE4508150	2400	3600	1500	1900	678.0	377.0	3.54	318	380	150	12839
DE4509150	2700	4050	1500	1900	745.9	424.1	3.62	325	380	150	14194
DE4510150	3000	4500	1500	1900	840.3	471.2	3.57	321	380	150	15549
DE4511150	3300	4950	1500	1900	891.9	518.3	3.7	333	380	150	16904
DE4512150	3600	5400	1500	1900	1000.0	565.4	3.6	326	380	150	18259


◆外形安装尺寸图

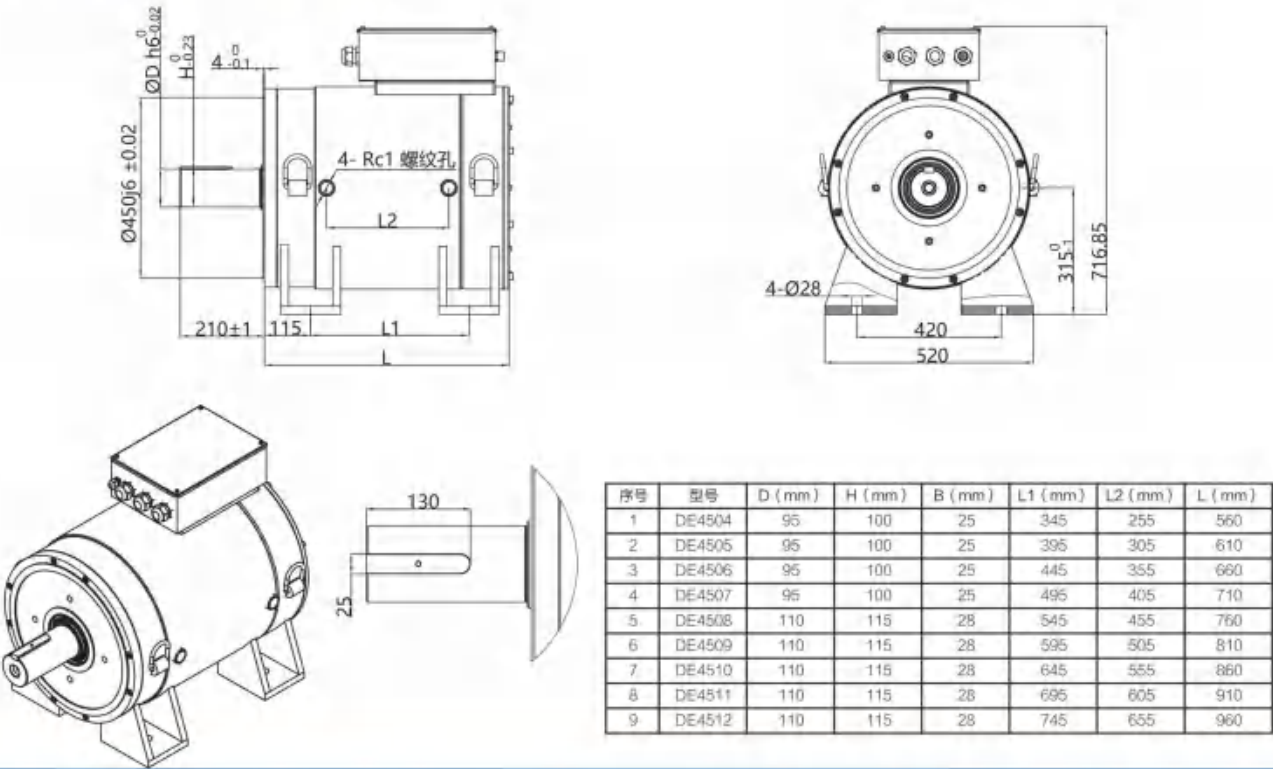

DE 52 系列
永磁同步伺服电机（液冷）


型号规格	额定转矩 (N·m)	额定转速下最大转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DE5208100	2400	3600	1000	1300	545	251	4.4	320	380	100	33560
DE5209100	2700	4050	1000	1300	607	283	4.45	325	380	100	37055
DE5210100	3000	4500	1000	1300	680	314	4.41	321	380	100	40550
DE5211100	3300	4950	1000	1300	752	346	4.39	324	380	100	44045
DE5212100	3600	5400	1000	1300	822	377	4.38	326	380	100	47540
DE5213100	3900	5850	1000	1300	874	408	4.46	320	380	100	51035
DE5214100	4200	6300	1000	1300	950	440	4.42	322	380	100	54530
DE5215100	4500	6750	1000	1300	1023	471	4.4	324	380	100	58025
DE5216100	4800	7200	1000	1300	1093	503	4.39	326	380	100	61520
DE5217100	5100	7650	1000	1300	1143	534	4.46	320	380	100	65015
DE5218100	5400	8100	1000	1300	1213	565	4.45	321	380	100	68510
DE5219100	5700	8550	1000	1300	1293	597	4.41	322	380	100	72005
DE5220100	6000	9000	1000	1300	1342	628	4.47	326	380	100	75500
DE5208150	2400	3600	1500	1900	800	377	3	329.5	380	150	33560
DE5209150	2700	4050	1500	1900	816	424	3.31	326	380	150	37055
DE5210150	3000	4500	1500	1900	904	471	3.32	325	380	150	40550
DE5211150	3300	4950	1500	1900	1003	518	3.29	329	380	150	44045
DE5212150	3600	5400	1500	1900	1091	565	3.3	328	380	150	47540
DE5213150	3900	5850	1500	1900	1164	613	3.35	324	380	150	51035
DE5214150	4200	6300	1500	1900	1265	660	3.32	326	380	150	54530
DE5215150	4500	6750	1500	1900	1360	707	3.31	329	380	150	58025
DE5216150	4800	7200	1500	1900	1455	754	3.3	328	380	150	61520
DE5217150	5100	7650	1500	1900	1536	801	3.32	327	380	150	65015
DE5218150	5400	8100	1500	1900	1622	848	3.33	326	380	150	68510
DE5219150	5700	8550	1500	1900	1781	895	3.2	325	380	150	72005
DE5220150	6000	9000	1500	1900	1818	942	3.3	324	380	150	75500

◆外形安装尺寸图

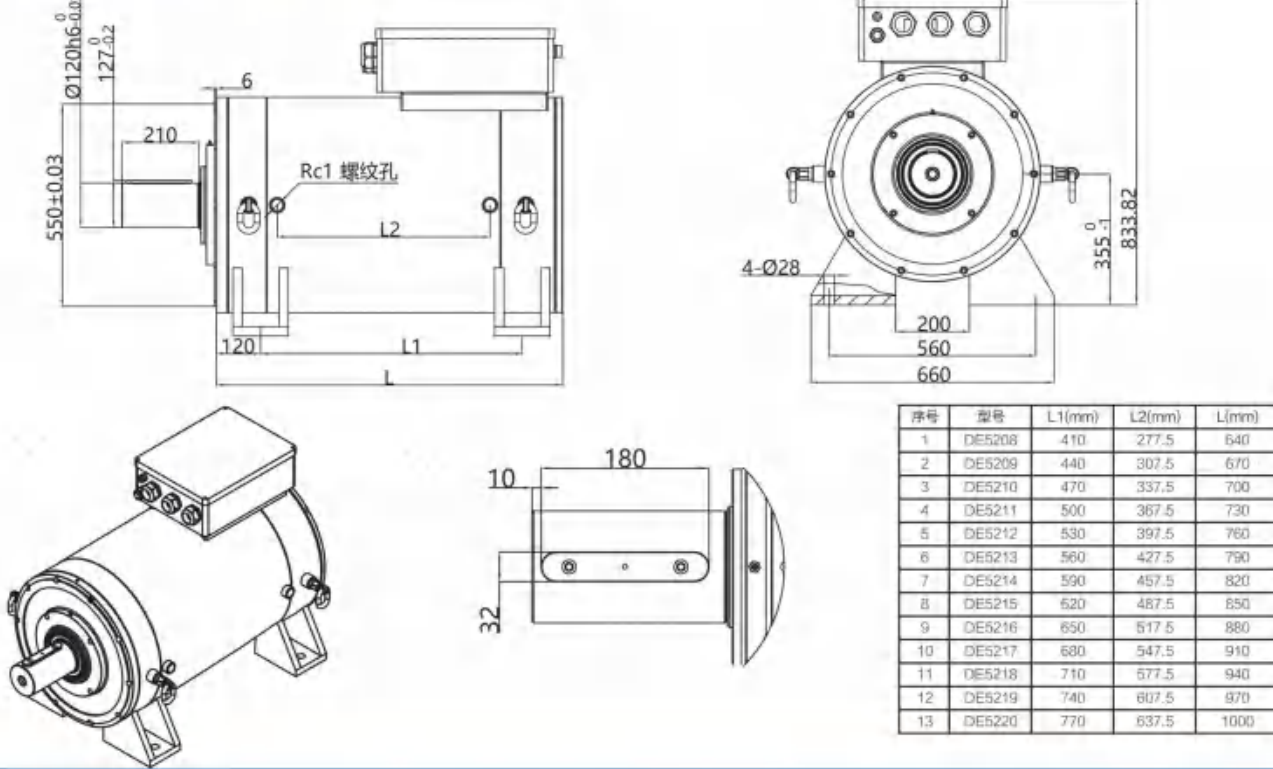


型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
ME1805100	53	1000	1500	9.9	5.5	5.33	306	380	66.7	95	137	60.5
ME1806100	72	1000	1500	13.3	7.5	5.37	308	380	66.7	114	164	67.2
ME1809100	105	1000	1500	19.5	11.0	5.4	310	380	66.7	171	245	88.2
ME1812100	143	1000	1500	26.6	15.0	5.38	309	380	66.7	228	326	109.2
ME1816100	177	1000	1500	31.6	18.5	5.59	321	380	66.7	304	434	136
ME1803150	35	1500	2000	10.6	5.5	3.3	305	380	100	58	83	47.1
ME1804150	48	1500	2000	14.5	7.5	3.3	300	380	100	76	110	53.8
ME1806150	70	1500	2000	21.2	11.0	3.3	300	380	100	114	164	67.2
ME1808150	96	1500	2000	28.9	15.0	3.3	308	380	100	152	218	81.5
ME1810150	118	1500	2000	35.7	18.5	3.3	306	380	100	228	326	94.9
ME1812150	140	1500	2000	42.4	22.0	3.3	308	380	100	266	380	109.2
ME1818150	191	1500	2000	57.9	30.0	3.3	305	380	100	342	488	149.4

◆外形安装尺寸图

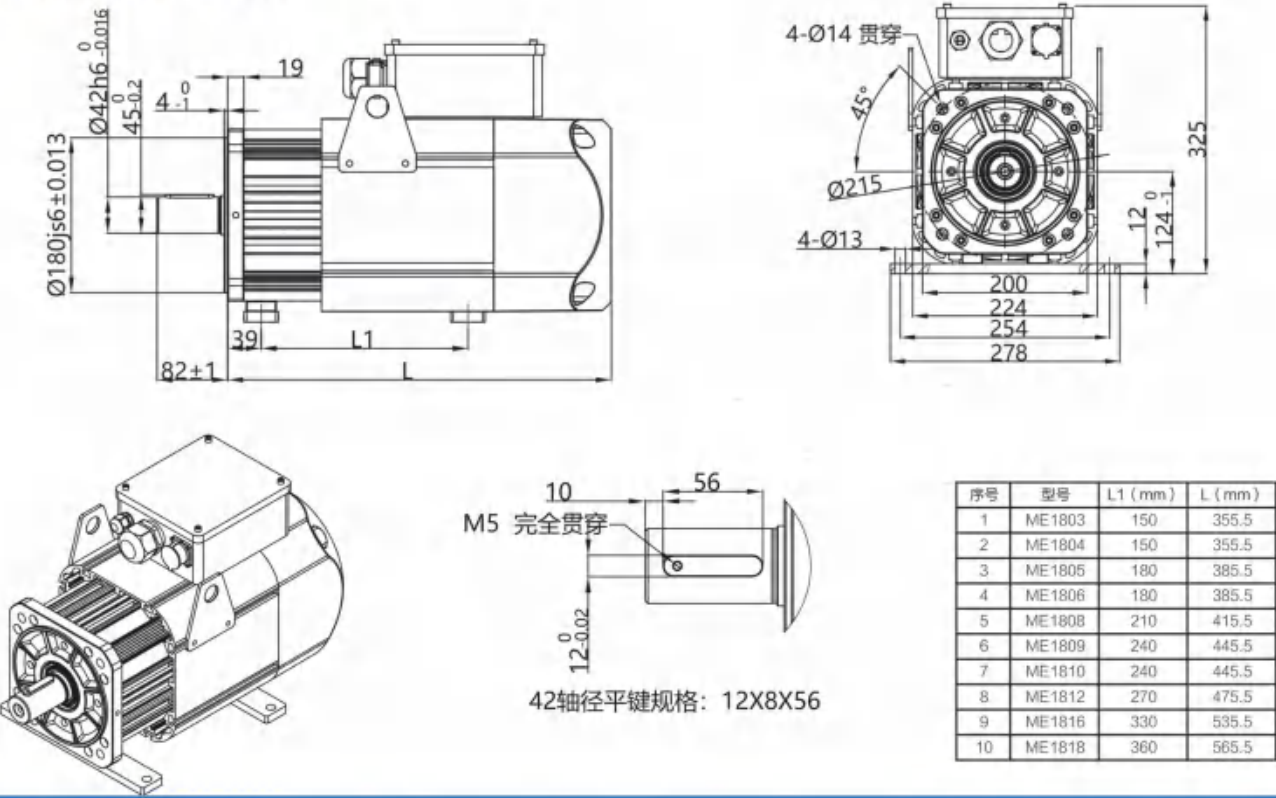

型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
ME1805100	53	1000	1500	9.9	5.5	5.33	306	380	66.7	95	137	60.5
ME1806100	72	1000	1500	13.3	7.5	5.37	308	380	66.7	114	164	67.2
ME1809100	105	1000	1500	19.5	11.0	5.4	310	380	66.7	171	245	88.2
ME1812100	143	1000	1500	26.6	15.0	5.38	309	380	66.7	228	326	109.2
ME1816100	177	1000	1500	31.6	18.5	5.59	321	380	66.7	304	434	136
ME1803150	35	1500	2000	10.6	5.5	3.3	305	380	100	58	83	47.1
ME1804150	48	1500	2000	14.5	7.5	3.3	300	380	100	76	110	53.8
ME1806150	70	1500	2000	21.2	11.0	3.3	300	380	100	114	164	67.2
ME1808150	96	1500	2000	28.9	15.0	3.3	308	380	100	152	218	81.5
ME1810150	118	1500	2000	35.7	18.5	3.3	306	380	100	228	326	94.9
ME1812150	140	1500	2000	42.4	22.0	3.3	308	380	100	266	380	109.2
ME1818150	191	1500	2000	57.9	30.0	3.3	305	380	100	342	488	149.4


◆外形安装尺寸图

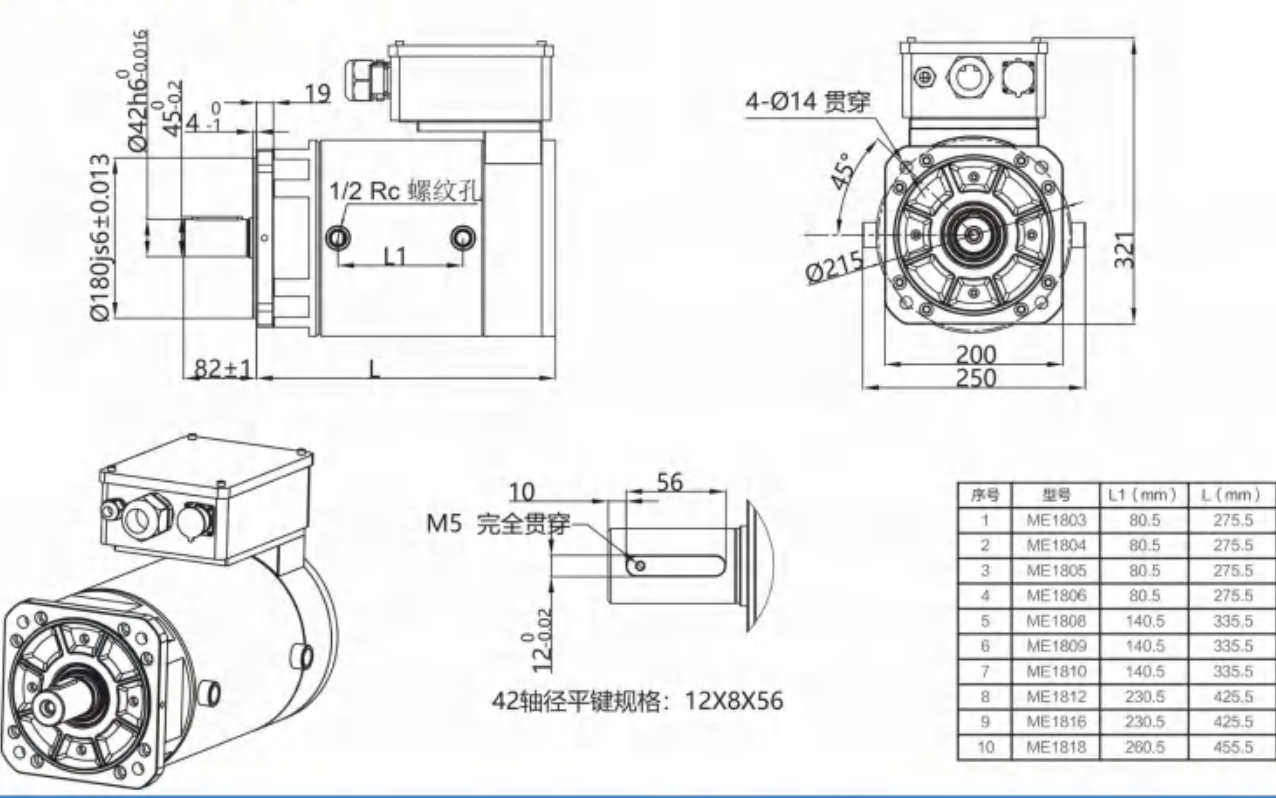


型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
ME2508100	210	1000	1500	35.3	22.0	5.96	341	380	66.7	340	440	360.4
ME2512100	287	1000	1500	51.5	30.0	5.56	318	380	66.7	508	660	515.8
ME2514100	353	1000	1500	61.6	37.0	5.74	328	380	66.7	593	770	593.5
ME2518100	430	1000	1500	77.6	45.0	5.54	317	380	66.7	763	990	755.5
ME2522100	525	1000	1500	93.3	55.0	5.63	322	380	66.7	932	1210	910.9
ME2508150	191	1500	2000	49.2	30.0	3.88	340	380	100	340	440	360.4
ME2510150	236	1500	2000	60.7	37.0	3.88	352	380	100	424	550	438.1
ME2512150	287	1500	2000	73.8	45.0	3.88	352	380	100	508	660	515.8
ME2514150	350	1500	2000	91.0	55.0	3.85	350	380	100	593	770	593.5
ME2518150	420	1500	2000	110.8	66.0	3.79	344	380	100	711	924	755.5
ME2520150	478	1500	2000	123.1	75.0	3.88	352	380	100	848	1100	833.2
ME2524150	573	1500	2000	147.7	90.0	3.88	352	380	100	1016	1320	988.6

型号规格	额定转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	额定转速最大扭矩 (N·m)	峰值扭矩 (N·m)	转动惯量 (kg·cm ²)
ME2508100	210	1000	1500	35.3	22.0	5.96	341	380	66.7	340	440	360.4
ME2512100	287	1000	1500	51.5	30.0	5.56	318	380	66.7	508	660	515.8
ME2514100	353	1000	1500	61.6	37.0	5.74	328	380	66.7	593	770	593.5
ME2518100	430	1000	1500	77.6	45.0	5.54	317	380	66.7	763	990	755.5
ME2522100	525	1000	1500	93.3	55.0	5.63	322	380	66.7	932	1210	910.9
ME2508150	191	1500	2000	49.2	30.0	3.88	340	380	100	340	440	360.4
ME2510150	236	1500	2000	60.7	37.0	3.88	352	380	100	424	550	438.1
ME2512150	287	1500	2000	73.8	45.0	3.88	352	380	100	508	660	515.8
ME2514150	350	1500	2000	91.0	55.0	3.85	350	380	100	593	770	593.5
ME2518150	420	1500	2000	110.8	66.0	3.79	344	380	100	711	924	755.5
ME2520150	478	1500	2000	123.1	75.0	3.88	352	380	100	848	1100	833.2
ME2524150	573	1500	2000	147.7	90.0	3.88	352	380	100	1016	1320	988.6

◆外形安装尺寸图

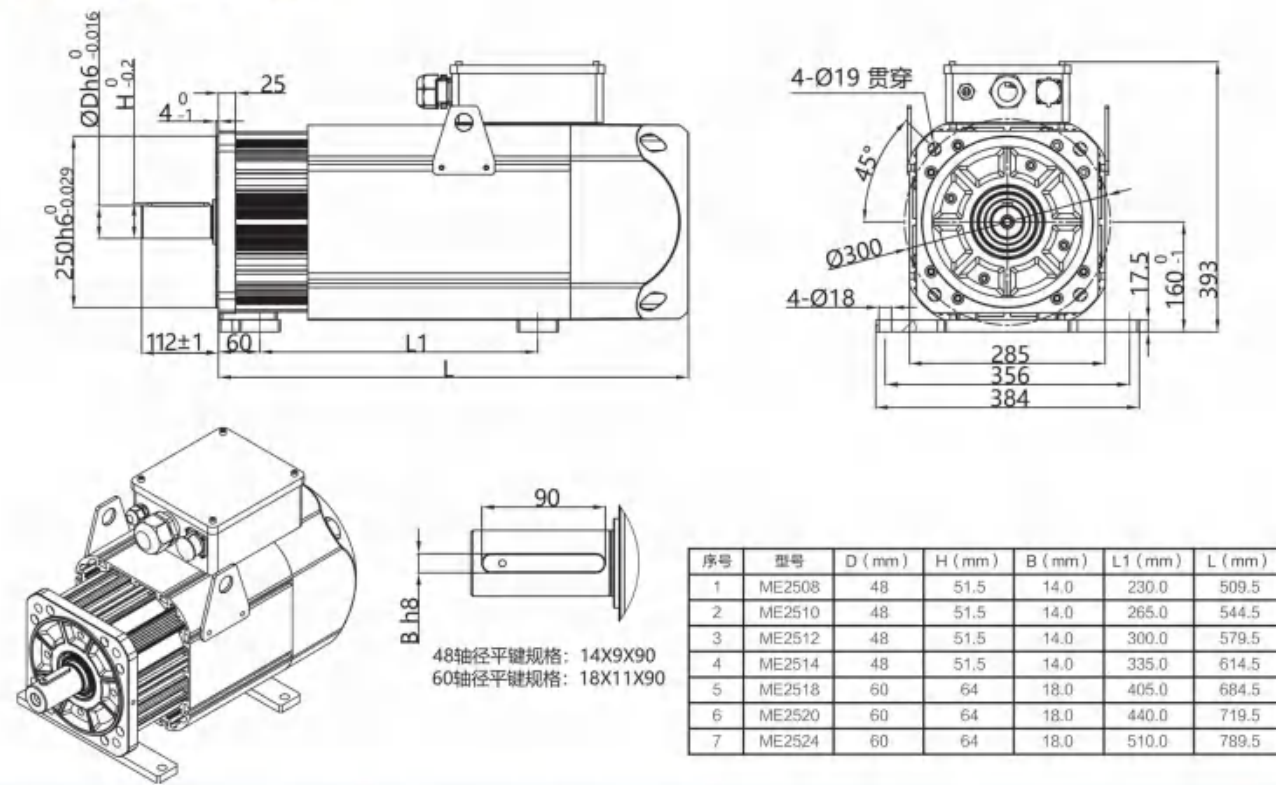


◆外形安装尺寸图

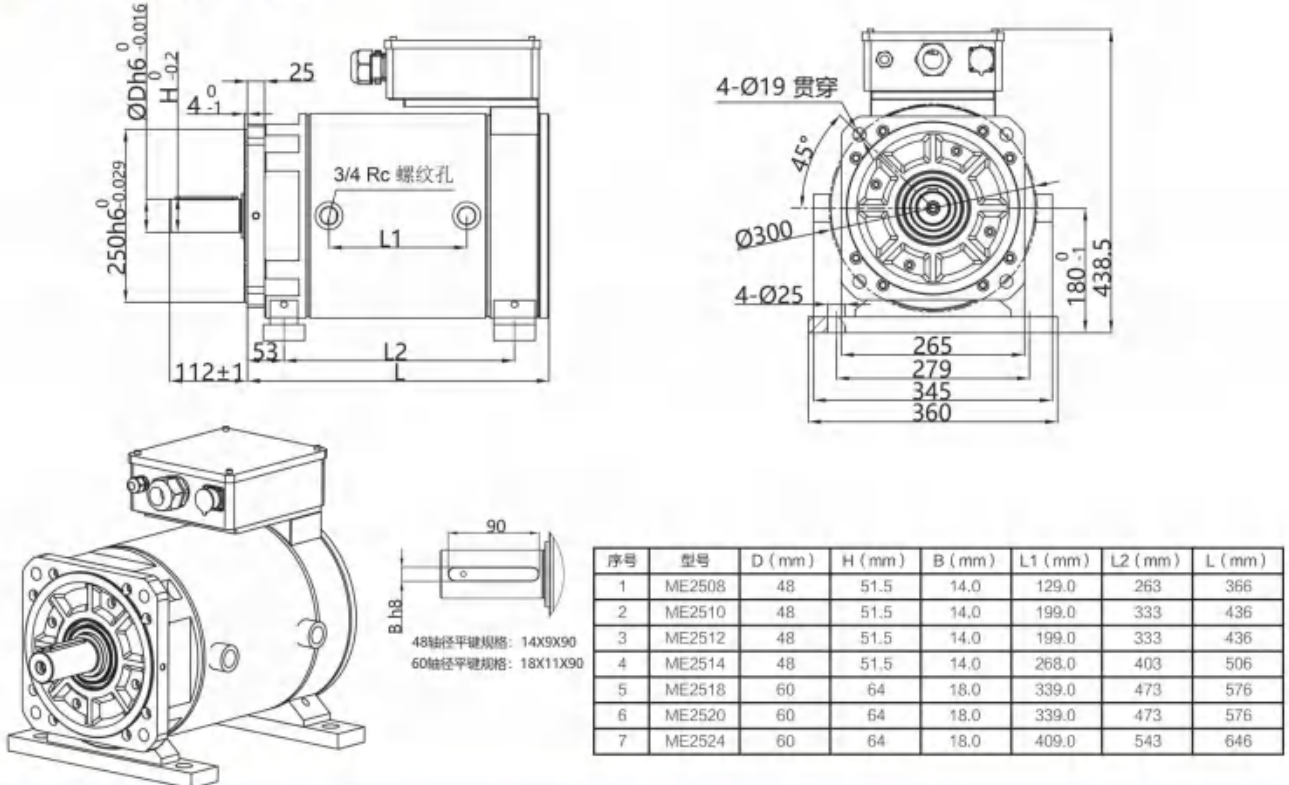


型号规格	额定功率 (kW)	额定转速 (rpm)	最高转速 (rpm)	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定电流 (A)	额定频率 (Hz)	KT (N·m/A)	反电势 (V)	电源等级 (V)	转动惯量 (kg·cm ²)
MH3508100	55	1000	1300	525	788	94.9	100	5.53	350	380	1610
MH3510100	75	1000	1300	716	1074	132.3	100	5.41	342	380	2002
MH3512100	90	1000	1300	860	1290	159.0	100	5.41	342	380	2394
MH3514100	110	1000	1300	1051	1577	192.5	100	5.46	346	380	2786
MH3516100	120	1000	1300	1146	1719	199.7	100	5.74	365	380	3180
MH3518100	132	1000	1300	1261	1892	233.1	100	5.41	342	380	3570
MH3520100	160	1000	1300	1528	2292	282.4	100	5.41	342	380	3962
MH3522100	172	1000	1300	1643	2465	310.6	100	5.29	334.5	380	4354
MH3524100	185	1000	1300	1767	2651	307.8	100	5.74	365	380	4746
MH3526100	200	1000	1300	1910	2865	335.7	100	5.69	365	380	5138
MH3508150	90	1500	1900	573	860	158.3	150	3.62	343	380	1610
MH3510150	110	1500	1900	700	1050	193.9	150	3.61	342	380	2002
MH3512150	132	1500	1900	840	1260	232.7	150	3.61	342	380	2394
MH3514150	160	1500	1900	1019	1529	271.7	150	3.75	360	380	2786
MH3516150	185	1500	1900	1178	1767	306.8	150	3.84	365	380	3180
MH3518150	200	1500	1900	1273	1910	339.5	150	3.75	360	380	3570
MH3520150	220	1500	1900	1401	2102	389.2	150	3.6	338	380	3962
MH3522150	250	1500	1900	1592	2388	403.0	150	3.95	377	380	4354
MH3524150	280	1500	1900	1783	2675	493.9	150	3.61	342	380	4746
MH3526150	315	1500	1900	2006	3009	543.6	150	3.69	342	380	5138

型号规格	额定功率 (kW)	额定转速 (rpm)	最高转速 (rpm)	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定电流 (A)	额定频率 (Hz)	KT (N·m/A)	反电势 (V)	电源等级 (V)	转动惯量 (kg·cm ²)
MH3508100	55	1000	1300	525	788	94.9	100	5.53	350	380	1610
MH3510100	75	1000	1300	716	1074	132.3	100	5.41	342	380	2002
MH3512100	90	1000	1300	860	1290	159.0	100	5.41	342	380	2394
MH3514100	110	1000	1300	1051	1577	192.5	100	5.46	346	380	2786
MH3516100	120	1000	1300	1146	1719	199.7	100	5.74	365	380	3180
MH3518100	132	1000	1300	1261	1892	233.1	100	5.41	342	380	3570
MH3520100	160	1000	1300	1528	2292	282.4	100	5.41	342	380	3962
MH3522100	172	1000	1300	1643	2465	310.6	100	5.29	334.5	380	4354
MH3524100	185	1000	1300	1767	2651	307.8	100	5.74	365	380	4746
MH3526100	200	1000	1300	1910	2865	335.7	100	5.69	365	380	5138
MH3508150	90	1500	1900	573	860	158.3	150	3.62	343	380	1610
MH3510150	110	1500	1900	700	1050	193.9	150	3.61	342	380	2002
MH3512150	132	1500	1900	840	1260	232.7	150	3.61	342	380	2394
MH3514150	160	1500	1900	1019	1529	271.7	150	3.75	360	380	2786
MH3516150	185	1500	1900	1178	1767	306.8	150	3.84	365	380	3180
MH3518150	200	1500	1900	1273	1910	339.5	150	3.75	360	380	3570
MH3520150	220	1500	1900	1401	2102	389.2	150	3.6	338	380	3962
MH3522150	250	1500	1900	1592	2388	403.0	150	3.95	377	380	4354
MH3524150	280	1500	1900	1783	2675	493.9	150	3.61	342	380	4746
MH3526150	315	1500	1900	2006	3009	543.6	150	3.69	342	380	5138

◆外形安装尺寸图

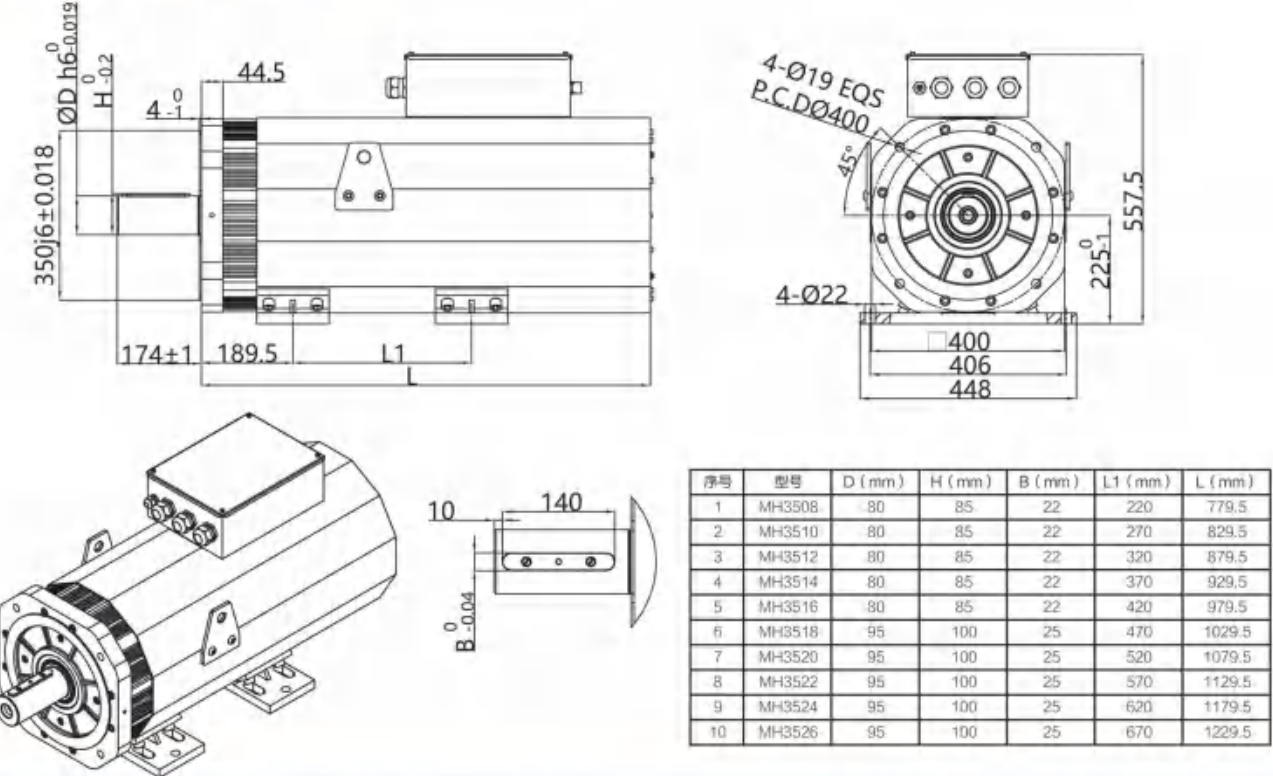

◆外形安装尺寸图

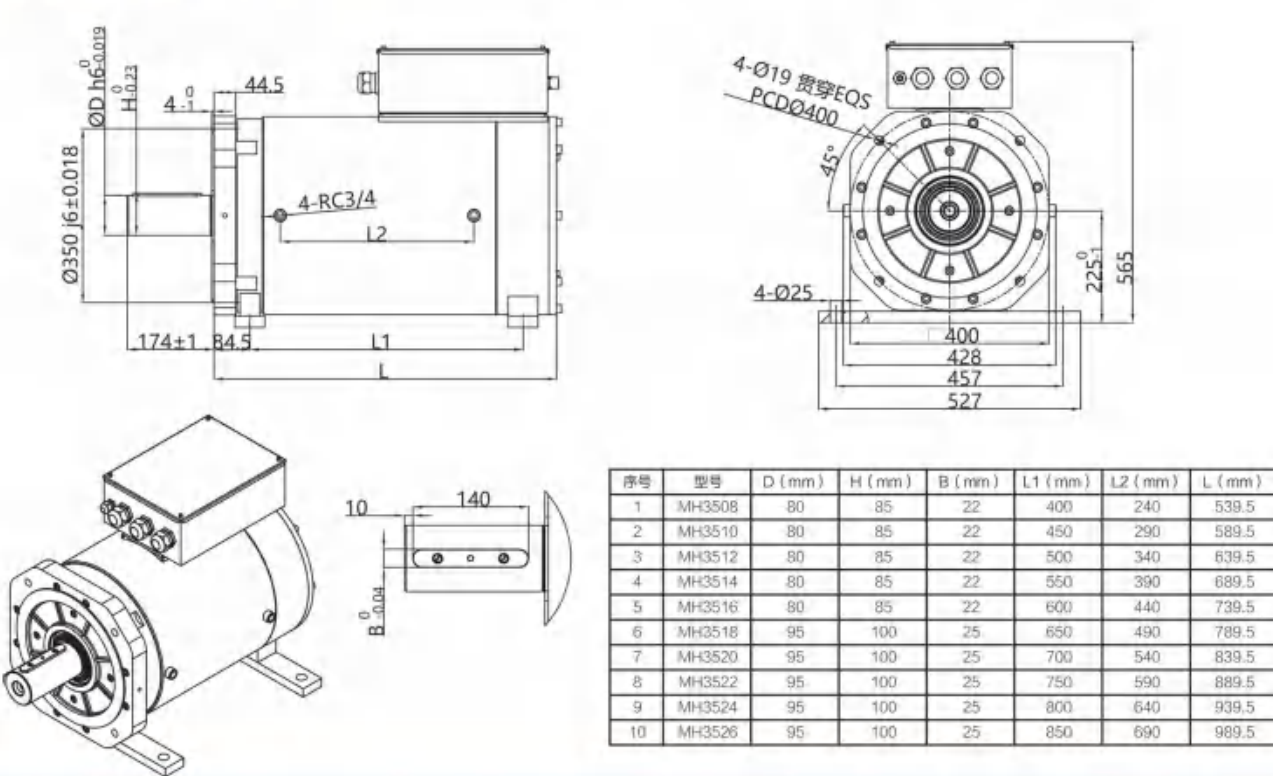


DZ 25系列
永磁同步伺服电机（直驱风冷）

DZ 25系列
永磁同步伺服电机（直驱液冷）

型号规格	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DZ2501030	70	100	300	400	4.6	2.2	15.15	299.3	380	50	151
DZ2502030	140	200	300	400	8.8	4.4	15.87	311.9	380	50	300
DZ2503030	210	300	300	400	13	6.6	16.13	313	380	50	449
DZ2504030	280	400	300	400	17.4	8.8	16.13	312.5	380	50	598
DZ2505030	350	500	300	400	21.8	11	16.03	311	380	50	747
DZ2506030	420	600	300	400	26	13.2	16.13	311.9	380	50	896
DZ2507030	490	700	300	400	30	15.4	16.35	316.3	380	50	1045
DZ2508030	560	800	300	400	34.3	17.6	16.32	316.2	380	50	1194
DZ2509030	630	900	300	400	38.9	19.8	16.19	315	380	50	1343
DZ2510030	700	1000	300	400	42.8	22	16.35	316	380	50	1492
DZ2501050	70	100	500	650	7.6	3.7	9.22	303.1	380	83.33	151
DZ2502050	140	200	500	650	14.3	7.3	9.8	318.6	380	83.33	300
DZ2503050	210	300	500	650	21.4	11	9.8	317.5	380	83.33	449
DZ2504050	280	400	500	650	28.6	14.7	9.8	317	380	83.33	598
DZ2505050	350	500	500	650	36.3	18.3	9.63	311	380	83.33	747
DZ2506050	420	600	500	650	42.9	22	9.8	316.4	380	83.33	896
DZ2507050	490	700	500	650	50	25.6	9.8	316.3	380	83.33	1045
DZ2508050	560	800	500	650	57.1	29.3	9.8	316.2	380	83.33	1194
DZ2509050	630	900	500	650	63.2	33	9.97	321.7	380	83.33	1343
DZ2510050	700	1000	500	650	70.6	36.6	9.92	319.8	380	83.33	1492
DZ2501075	70	100	750	1000	11.1	5.5	6.32	310.8	380	125	151
DZ2502075	140	200	750	1000	21.3	11	6.58	318.7	380	125	300
DZ2503075	210	300	750	1000	32.5	16.5	6.46	314.7	380	125	449
DZ2504075	280	400	750	1000	42.8	22	6.54	317	380	125	598
DZ2505075	350	500	750	1000	54.8	27.5	6.39	311	380	125	747
DZ2506075	420	600	750	1000	63.1	33	6.66	322.1	380	125	896
DZ2507075	490	700	750	1000	75.4	38.5	6.5	316.3	380	125	1045
DZ2508075	560	800	750	1000	86.2	44	6.5	316.2	380	125	1194
DZ2509075	630	900	750	1000	100.3	49.5	6.28	304.8	380	125	1343
DZ2510075	700	1000	750	1000	109.5	55	6.39	310.4	380	125	1492


型号规格	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DZ2501030	70	100	300	400	4.6	2.2	15.15	299.3	380	50	151
DZ2502030	140	200	300	400	8.8	4.4	15.87	311.9	380	50	300
DZ2503030	210	300	300	400	13	6.6	16.13	313	380	50	449
DZ2504030	280	400	300	400	17.4	8.8	16.13	312.5	380	50	598
DZ2505030	350	500	300	400	21.8	11	16.03	311	380	50	747
DZ2506030	420	600	300	400	26	13.2	16.13	311.9	380	50	896
DZ2507030	490	700	300	400	30	15.4	16.35	316.3	380	50	1045
DZ2508030	560	800	300	400	34.3	17.6	16.32	316.2	380	50	1194
DZ2509030	630	900	300	400	38.9	19.8	16.19	315	380	50	1343
DZ2510030	700	1000	300	400	42.8	22	16.35	316	380	50	1492
DZ2501050	70	100	500	650	7.6	3.7	9.22	303.1	380	83.33	151
DZ2502050	140	200	500	650	14.3	7.3	9.8	318.6	380	83.33	300
DZ2503050	210	300	500	650	21.4	11	9.8	317.5	380	83.33	449
DZ2504050	280	400	500	650	28.6	14.7	9.8	317	380	83.33	598
DZ2505050	350	500	500	650	36.3	18.3	9.63	311	380	83.33	747
DZ2506050	420	600	500	650	42.9	22	9.8	316.4	380	83.33	896
DZ2507050	490	700	500	650	50	25.6	9.8	316.3	380	83.33	1045
DZ2508050	560	800	500	650	57.1	29.3	9.8	316.2	380	83.33	1194
DZ2509050	630	900	500	650	63.2	33	9.97	321.7	380	83.33	1343
DZ2510050	700	1000	500	650	70.6	36.6	9.92	319.8	380	83.33	1492
DZ2501075	70	100	750	1000	11.1	5.5	6.32	310.8	380	125	151
DZ2502075	140	200	750	1000	21.3	11	6.58	318.7	380	125	300
DZ2503075	210	300	750	1000	32.5	16.5	6.46	314.7	380	125	449
DZ2504075	280	400	750	1000	42.8	22	6.54	317	380	125	598
DZ2505075	350	500	750	1000	54.8	27.5	6.39	311	380	125	747
DZ2506075	420	600	750	1000	63.1	33	6.66	322.1	380	125	896
DZ2507075	490	700	750	1000	75.4	38.5	6.5	316.3	380	125	1045
DZ2508075	560	800	750	1000	86.2	44	6.5	316.2	380	125	1194
DZ2509075	630	900	750	1000	100.3	49.5	6.28	304.8	380	125	1343
DZ2510075	700	1000	750	1000	109.5	55	6.39	310.4	380	125	1492

◆外形安装尺寸图

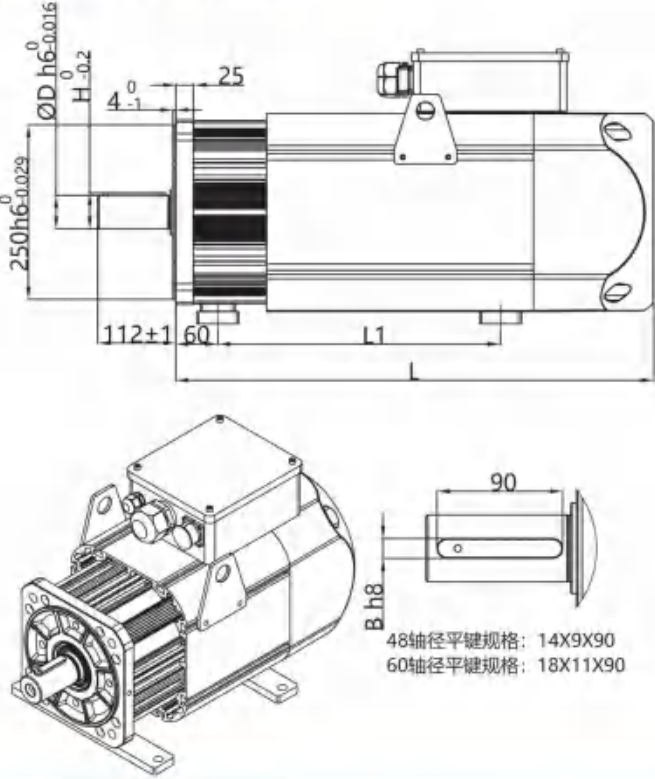

序号	型号	D (mm)	H (mm)	B (mm)	L1 (mm)	L (mm)
1	DZ2503	48	51.5	14	230	509.5
2	DZ2504	48	51.5	14	265	544.5
3	DZ2505	48	51.5	14	300	579.5
4	DZ2506	48	51.5	14	335	614.5
5	DZ2507	48	51.5	14	370	649.5
6	DZ2508	60	64	18	405	684.5
7	DZ2509	60	64	18	440	719.5
8	DZ2510	60	64	18	510	789.5


◆外形安装尺寸图

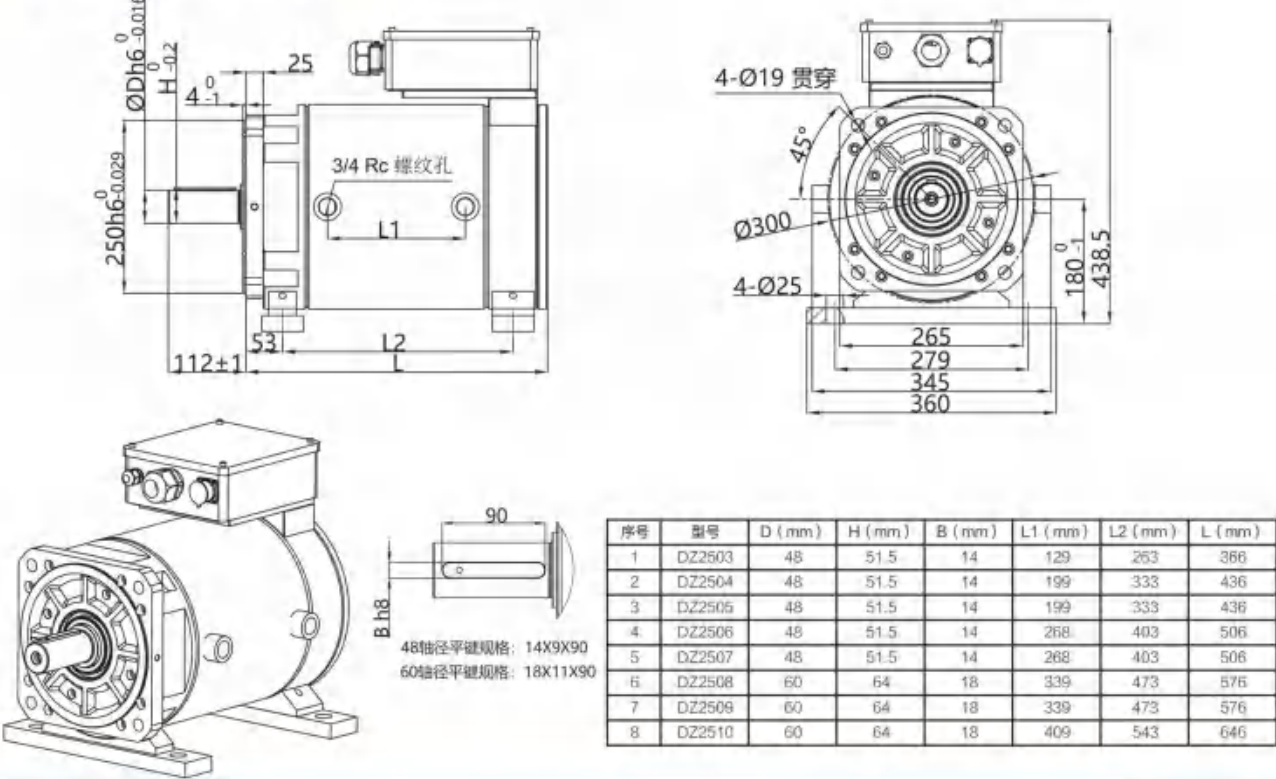

序号	型号	D (mm)	H (mm)	B (mm)	L1 (mm)	L2 (mm)	L (mm)
1	DZ2503	48	51.5	14	129	263	386
2	DZ2504	48	51.5	14	199	333	436
3	DZ2505	48	51.5	14	199	333	436
4	DZ2506	48	51.5	14	268	403	506
5	DZ2507	48	51.5	14	268	403	506
6	DZ2508	60	64	18	339	473	576
7	DZ2509	60	64	18	339	473	576
8	DZ2510	60	64	18	409	543	646


型号规格	额定转矩 (N·m)	额定转速下最大转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DZ3503030	600	900	300	400	38.5	18.8	15.58	302	380	50	2574
DZ3504030	800	1200	300	400	51	25.1	15.69	306	380	50	3417
DZ3505030	1000	1500	300	400	65.5	31.4	15.27	297	380	50	4260
DZ3506030	1200	1800	300	400	74	37.7	16.22	314	380	50	5103
DZ3507030	1400	2100	300	400	88	44	15.91	309	380	50	5946
DZ3508030	1600	2400	300	400	102	50.2	15.69	305	380	50	6789
DZ3509030	1800	2700	300	400	117	56.5	15.38	298	380	50	7632
DZ3510030	2000	3000	300	400	125	62.8	16	311	380	50	8475
DZ3503050	600	900	500	650	65.5	31.4	9.16	297	380	83.33	2574
DZ3504050	800	1200	500	650	88	41.9	9.09	295	380	83.33	3417
DZ3505050	1000	1500	500	650	102	52.3	9.8	318	380	83.33	4260
DZ3506050	1200	1800	500	650	125	62.8	9.6	311	380	83.33	5103
DZ3507050	1400	2100	500	650	149	73.3	9.4	305	380	83.33	5946
DZ3508050	1600	2400	500	650	168	83.7	9.52	308	380	83.33	6789
DZ3509050	1800	2700	500	650	184	94.2	9.78	316	380	83.33	7632
DZ3510050	2000	3000	500	650	215	104.7	9.3	301	380	83.33	8475
DZ3503075	600	900	750	1000	95	47.1	6.32	310	380	125	2574
DZ3504075	800	1200	750	1000	125	62.8	6.4	312	380	125	3417
DZ3505075	1000	1500	750	1000	162	78.5	6.17	302	380	125	4260
DZ3506075	1200	1800	750	1000	194	94.2	6.19	302	380	125	5103
DZ3507075	1400	2100	750	1000	228	109.9	6.14	299	380	125	5946
DZ3508075	1600	2400	750	1000	259	125.6	6.18	301	380	125	6789
DZ3509075	1800	2700	750	1000	278	141.3	6.47	316	380	125	7632
DZ3510075	2000	3000	750	1000	323	157	6.19	301	380	125	8475

◆外形安装尺寸图

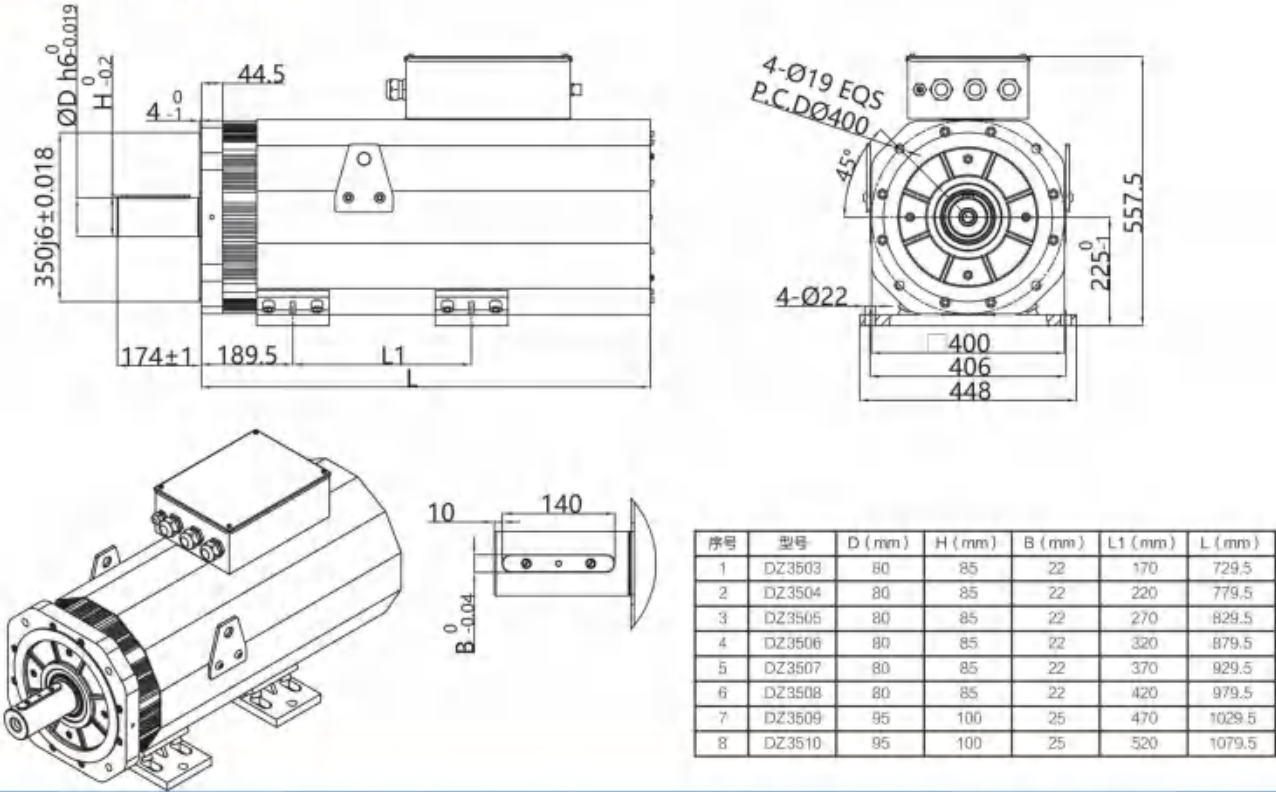


型号规格	额定转矩 (N·m)	额定转速下最大转矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DZ3503030	600	900	300	400	38.5	18.8	15.58	302	380	50	2574
DZ3504030	800	1200	300	400	51	25.1	15.69	306	380	50	3417
DZ3505030	1000	1500	300	400	65.5	31.4	15.27	297	380	50	4260
DZ3506030	1200	1800	300	400	74	37.7	16.22	314	380	50	5103
DZ3507030	1400	2100	300	400	88	44	15.91	309	380	50	5946
DZ3508030	1600	2400	300	400	102	50.2	15.69	305	380	50	6789
DZ3509030	1800	2700	300	400	117	56.5	15.38	298	380	50	7632
DZ3510030	2000	3000	300	400	125	62.8	16	311	380	50	8475
DZ3503050	600	900	500	650	65.5	31.4	9.16	297	380	83.33	2574
DZ3504050	800	1200	500	650	88	41.9	9.09	295	380	83.33	3417
DZ3505050	1000	1500	500	650	102	52.3	9.8	318	380	83.33	4260
DZ3506050	1200	1800	500	650	125	62.8	9.6	311	380	83.33	5103
DZ3507050	1400	2100	500	650	149	73.3	9.4	305	380	83.33	5946
DZ3508050	1600	2400	500	650	168	83.7	9.52	308	380	83.33	6789
DZ3509050	1800	2700	500	650	184	94.2	9.78	316	380	83.33	7632
DZ3510050	2000	3000	500	650	215	104.7	9.3	301	380	83.33	8475
DZ3503075	600	900	750	1000	95	47.1	6.32	310	380	125	2574
DZ3504075	800	1200	750	1000	125	62.8	6.4	312	380	125	3417
DZ3505075	1000	1500	750	1000	162	78.5	6.17	302	380	125	4260
DZ3506075	1200	1800	750	1000	194	94.2	6.19	302	380	125	5103
DZ3507075	1400	2100	750	1000	228	109.9	6.14	299	380	125	5946
DZ3508075	1600	2400	750	1000	259	125.6	6.18	301	380	125	6789
DZ3509075	1800	2700	750	1000	278	141.3	6.47	316	380	125	7632
DZ3510075	2000	3000	750	1000	323	157	6.19	301	380	125	8475

◆外形安装尺寸图

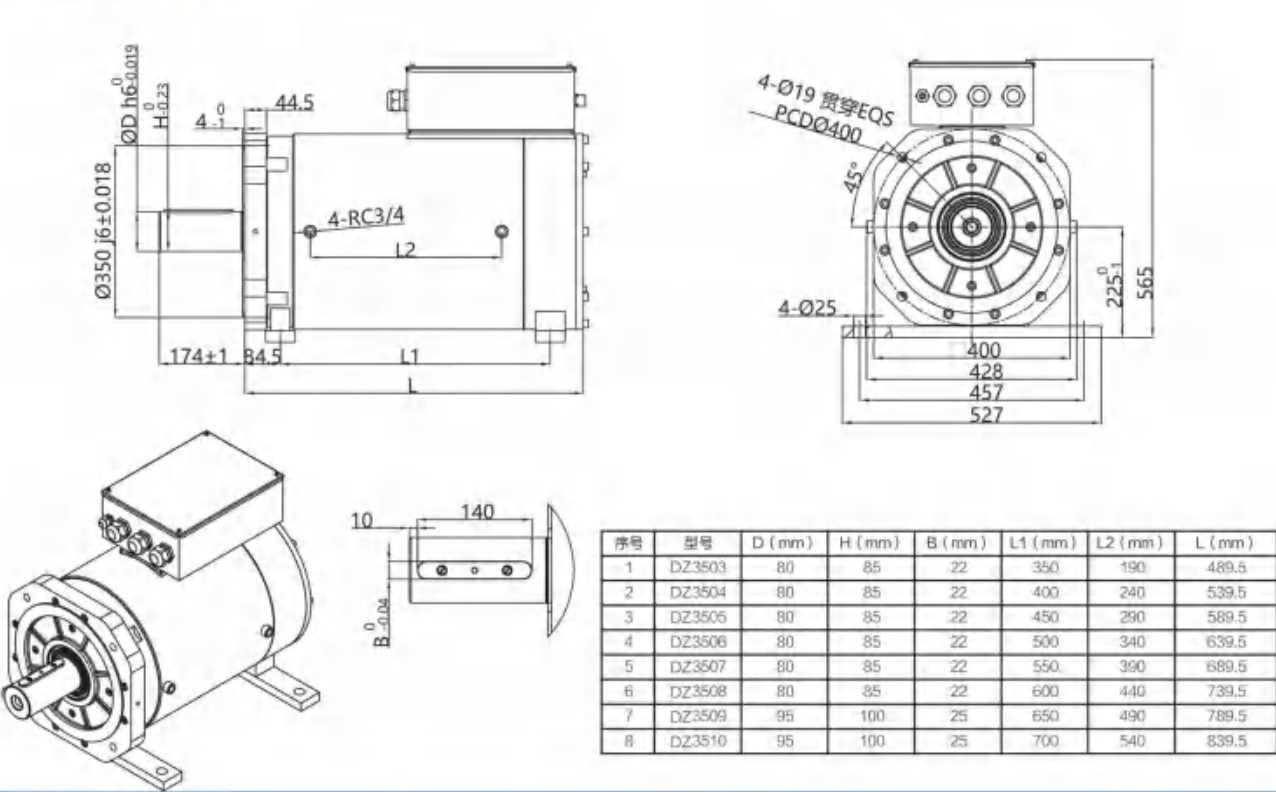


型号规格	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
DZ5204040	1800	2700	300	400	124	57	14.5	220	380	100	20380
DZ5205040	2250	3375	300	400	154	71	14.6	219	380	100	24880
DZ5206040	2700	4050	300	400	189	85	14.3	221	380	100	29380
DZ5207040	3150	4725	300	400	217	99	14.5	220	380	100	33880
DZ5208040	3600	5400	300	400	245	113	14.7	222	380	100	38380
DZ5209040	4050	6075	300	400	274	127	14.8	223	380	100	42880
DZ5210040	4500	6750	300	400	317	141	14.2	221	380	100	47380
DZ5211040	4950	7425	300	400	351	155	14.1	225	380	100	51880
DZ5212040	5400	8100	300	400	372	170	14.5	226	380	100	56380
DZ5213040	5850	8775	300	400	401	184	14.6	224	380	100	60880
DZ5214040	6300	9450	300	400	429	198	14.7	221	380	100	65380
DZ5215040	6750	10125	300	400	456	212	14.8	220	380	100	69880
DZ5216040	7200	10800	300	400	497	226	14.5	222	380	100	74380
DZ5217040	7650	11475	300	400	539	240	14.2	223	380	100	78880
DZ5218040	8100	12150	300	400	555	254	14.6	221	380	100	83380
DZ5219040	8550	12825	300	400	582	269	14.7	225	380	100	87880
DZ5220040	9000	13500	300	400	608	283	14.8	220	380	100	92380

◆外形安装尺寸图

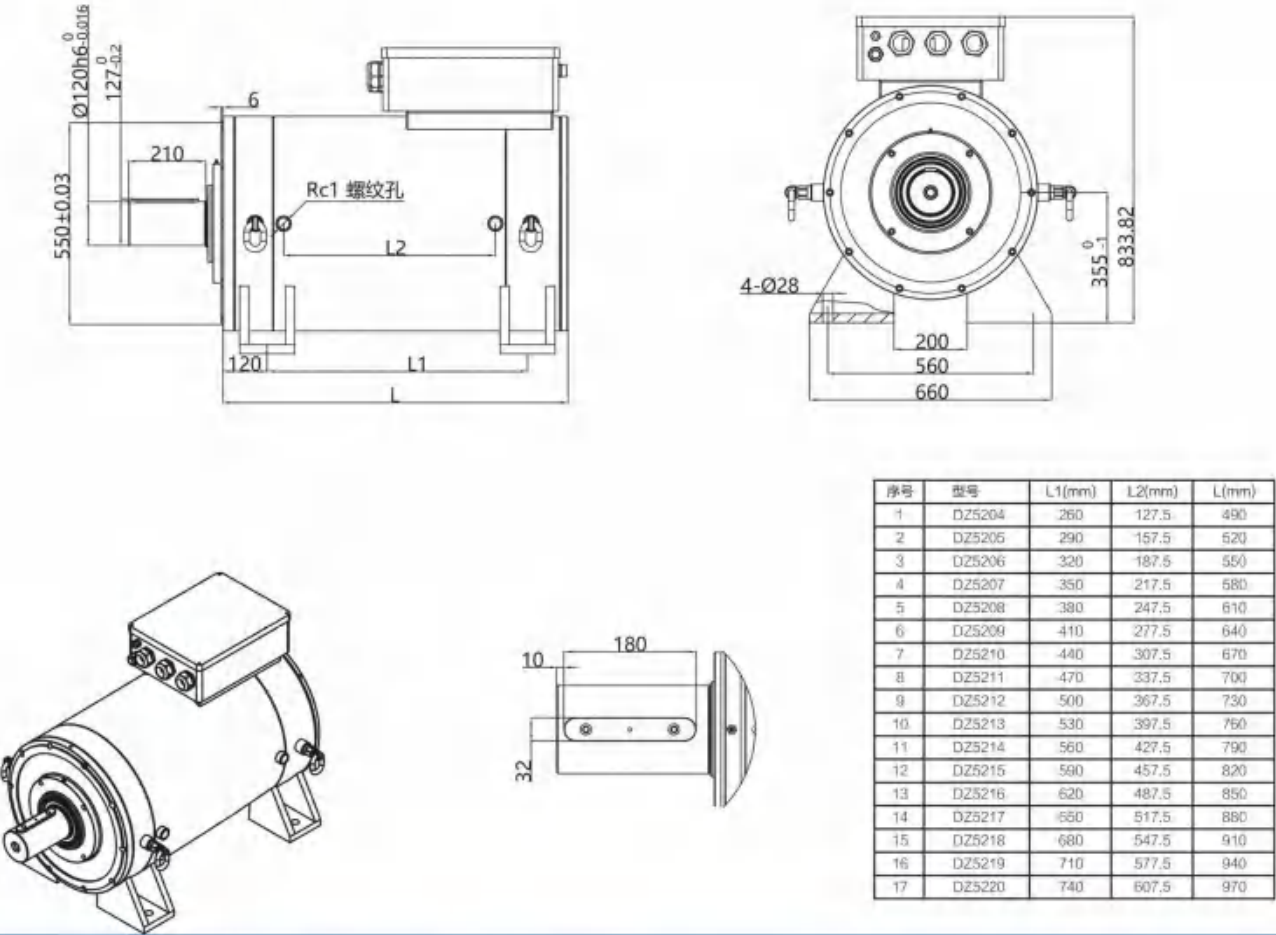

型号规格	额定转矩 (N·m)	额定转速下最大扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)
MH4508075	1146	1719	750	975	160.7	90	7.13	310	380	75	7419
MH4510075	1528	2292	750	975	217.0	120	7.04	306	380	75	8774
MH4512075	1783	2674	750	975	255.8	140	6.97	303	380	75	10129
MH4514075	2101	3152	750	975	294.7	165	7.13	310	380	75	11484
MH4516075	2356	3534	750	975	332.7	185	7.08	308	380	75	12839
MH4518075	2547	3820	750	975	357.2	200	7.13	305	380	75	14194
MH4520075	2801	4202	750	975	399.1	220	7.02	310	380	75	15549
MH4522075	3311	4966	750	975	463.7	260	7.14	310	380	75	16904
MH4524075	3565	5348	750	975	500.0	280	7.13	315	380	75	18259
MH4508100	1146	1719	1000	1300	214.2	120	5.35	315	380	100	7419
MH4510100	1528	2292	1000	1300	289.4	160	5.28	311	380	100	8774
MH4512100	1767	2650	1000	1300	332.1	185	5.32	313	380	100	10129
MH4514100	2101	3152	1000	1300	396.4	220	5.3	312	380	100	11484
MH4516100	2388	3581	1000	1300	452.2	250	5.28	311	380	100	12839
MH4518100	2674	4011	1000	1300	506.4	280	5.28	311	380	100	14194
MH4520100	3008	4512	1000	1300	559.2	315	5.38	317	380	100	15549
MH4522100	3247	4871	1000	1300	591.4	340	5.49	310	380	100	16904
MH4524100	3438	5157	1000	1300	648.7	360	5.3	315	380	100	18259
MH4508150	1178	1767	1500	1900	330.9	185	3.56	320	380	150	7419
MH4510150	1401	2101	1500	1900	403.7	220	3.47	312	380	150	8774
MH4512150	1783	2674	1500	1900	500.7	280	3.56	320	380	150	10129
MH4514150	2006	3008	1500	1900	558.6	315	3.59	323	380	150	11484
MH4516150	2260	3390	1500	1900	638.5	355	3.54	318	380	150	12839
MH4518150	2547	3820	1500	1900	703.5	400	3.62	325	380	150	14194
MH4520150	2865	4298	1500	1900	802.5	450	3.57	321	380	150	15549
MH4522150	3183	4775	1500	1900	860.4	500	3.7	333	380	150	16904
MH4524150	3502	5253	1500	1900	972.7	550	3.6	326	380	150	18259


◆外形安装尺寸图

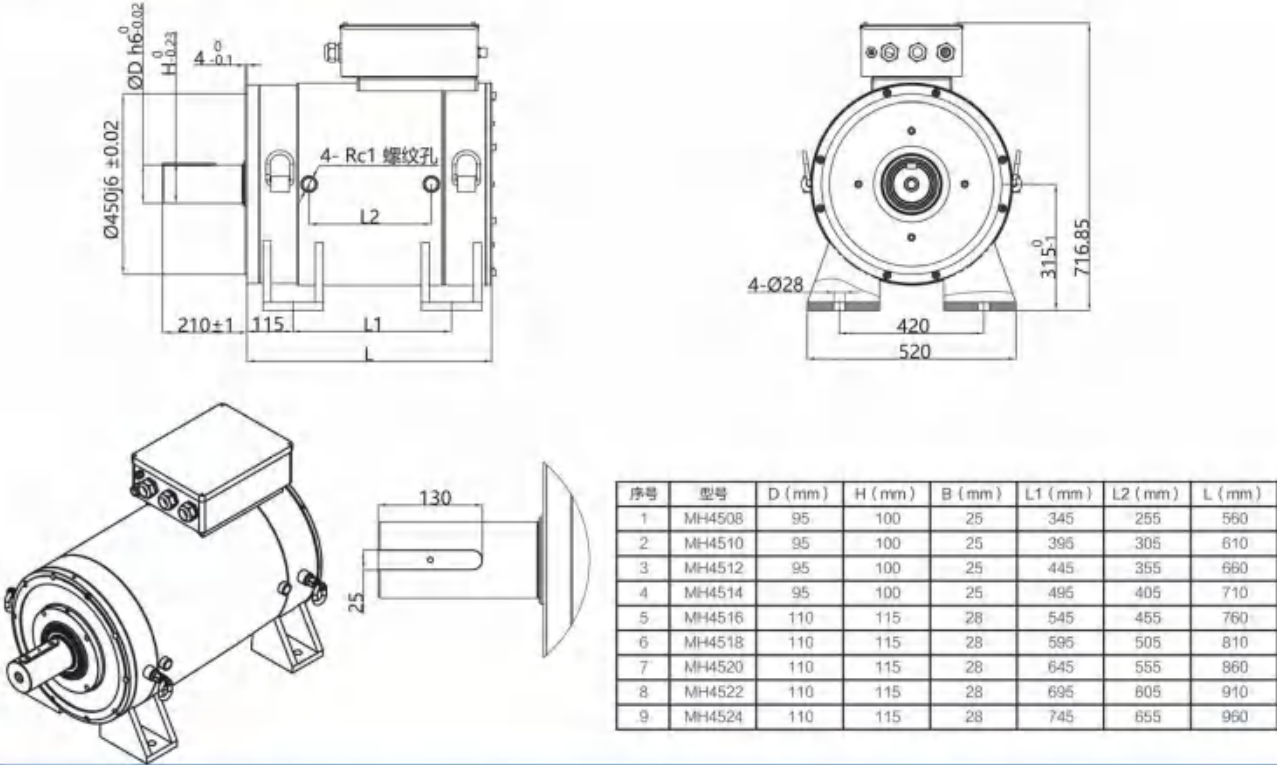


型号规格	额定转矩 (N·m)	峰值扭矩 (N·m)	额定转速 (rpm)	最高转速 (rpm)	额定电流 (A)	额定功率 (kW)	KT (N·m/A)	反电势 (V)	电源等级 (V)	额定频率 (Hz)	转动惯量 (kg·cm ²)	兼容马达
DZ35T03030-4RES1-W	500	750	300	450	36	15.7	13.9	319	380	125	3400	03马达
DZ35T04030-4RES1-W	700	1050	300	450	51	22	13.7	308	380	125	4200	06马达
DZ35T05030-4RES1-W	850	1275	300	450	61	26.7	13.9	317	380	125	5000	06/08马达
DZ35T06030-4RES1-W	1000	1500	300	450	69	31.4	14.5	310	380	125	5800	08/11马达
DZ35T07030-4RES1-W	1200	1800	300	450	85	37.7	14.1	316	380	125	6600	11马达
DZ35T08030-4RES1-W	1350	2025	300	450	94	42.4	14.3	310	380	125	7400	11马达
DZ35T09030-4RES1-W	1500	2250	300	450	103	47.1	14.5	314	380	125	8200	11马达
DZ35T03030-4RES1-W	500	750	400	600	47	20.9	10.5	313	380	166.7	3400	03马达
DZ35T04040-4RES1-W	700	1050	400	600	67	29.3	10.4	318	380	166.7	4200	06马达
DZ35T05040-4RES1-W	850	1275	400	600	81	35.6	10.5	317	380	166.7	5000	06马达
DZ35T06040-4RES1-W	1000	1500	400	600	98	41.9	10.2	300	380	166.7	5800	08/11马达
DZ35T07040-4RES1-W	1200	1800	400	600	116	50.3	10.3	315	380	166.7	6600	11马达
DZ35T08040-4RES1-W	1350	2025	400	600	128	56.5	10.5	311	380	166.7	7400	11马达
DZ35T09040-4RES1-W	1500	2250	400	600	141	62.8	10.6	310	380	166.7	8200	11马达

型号	额定转速 (rpm)	额定转矩S1 (N·m)	额定功率S1 (kw)	额定电流 (A)	额定电压 (V)	兼容马达
IM08-1000-250-K*	250	1000	26.2	49.0	380	08马达
IM08-1350-250-K*	250	1350	35.3	64.7	380	
IM11-1600-250-K*	250	1600	41.9	78.4	380	11马达
IM11-1800-250-K*	250	1800	47.1	87.5	380	
IM11-2000-250-K*	250	2000	52.4	95.1	380	16马达
IM16-3000-250-K*	250	3000	78.5	137.9	380	
IM16-3600-250-K*	250	3600	94.2	165.4	380	31马达 200马达
IM31-3000-200-K*	200	3000	62.8	136.1	380	
IM31-3600-200-K*	200	3600	75.4	163.3	380	
IM31-4000-200-K*	200	4000	83.8	181.4	380	
IM31-4500-200-K*	200	4500	94.2	204.1	380	
IM31-5000-200-K*	200	5000	104.7	226.8	380	
IM31A-6000-200-K*	166	5400	104.3	222.2	380	31马达 270/325马达
IM31A-7200-200-K*	166	7200	125.2	266.7	380	
IM410-9000-125-K*	125	9000	117.8	223.2	380	325/400马达
IM410-11000-125-K*	125	11000	144.0	272.8	380	
IM470-15000-125-K*	125	15000	196.3	372.0	380	CA140/210马达
IM470-25000-75-K*	75	25000	196.3	333.3	380	
IM510-31000-75-K*	75	31000	243.5	413.3	380	CA210马达
IM510-33000-75-K*	75	33000	259.2	458.3	380	
IM565-38000-75-K*	75	38000	298.4	533.7	380	CA210马达
IM565-44000-75-K*	75	44000	345.5	612.8	380	
IM565-48000-75-K*	75	48000	377.0	678.0	380	


◆外形安装尺寸图

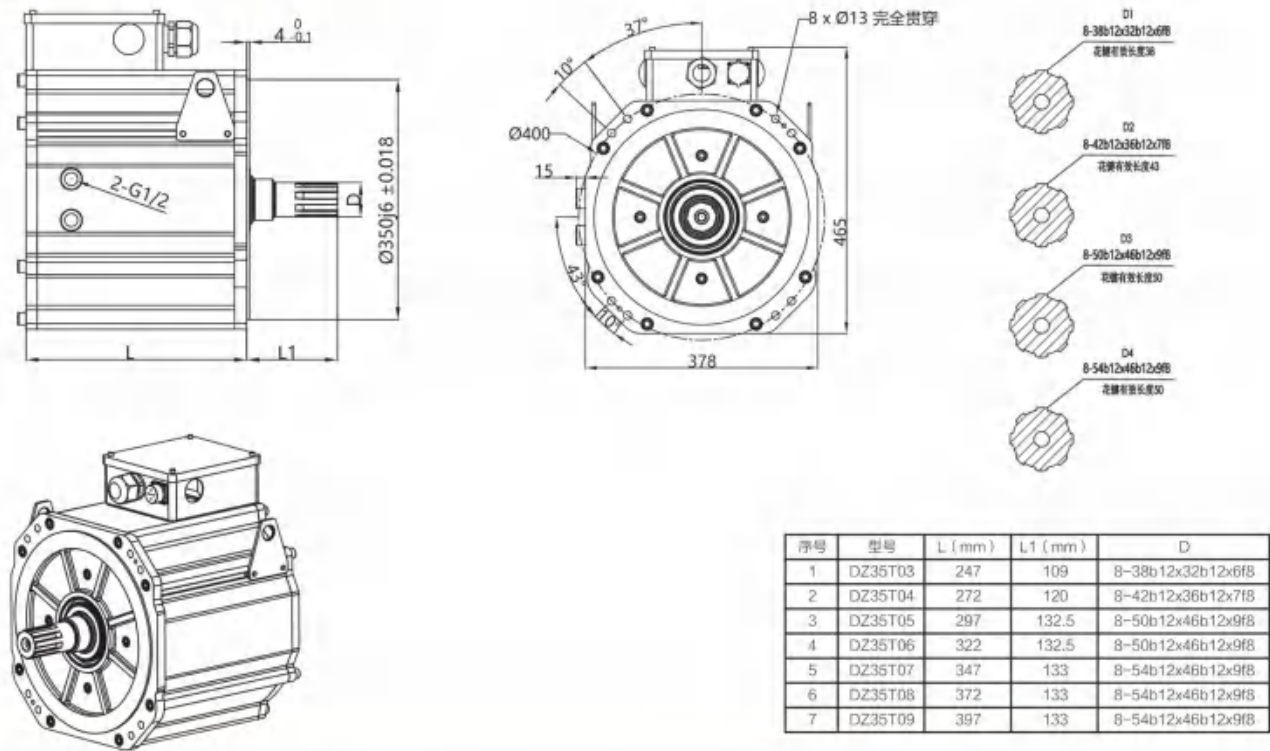


◆外形安装尺寸图 (IM 08/11 系列)

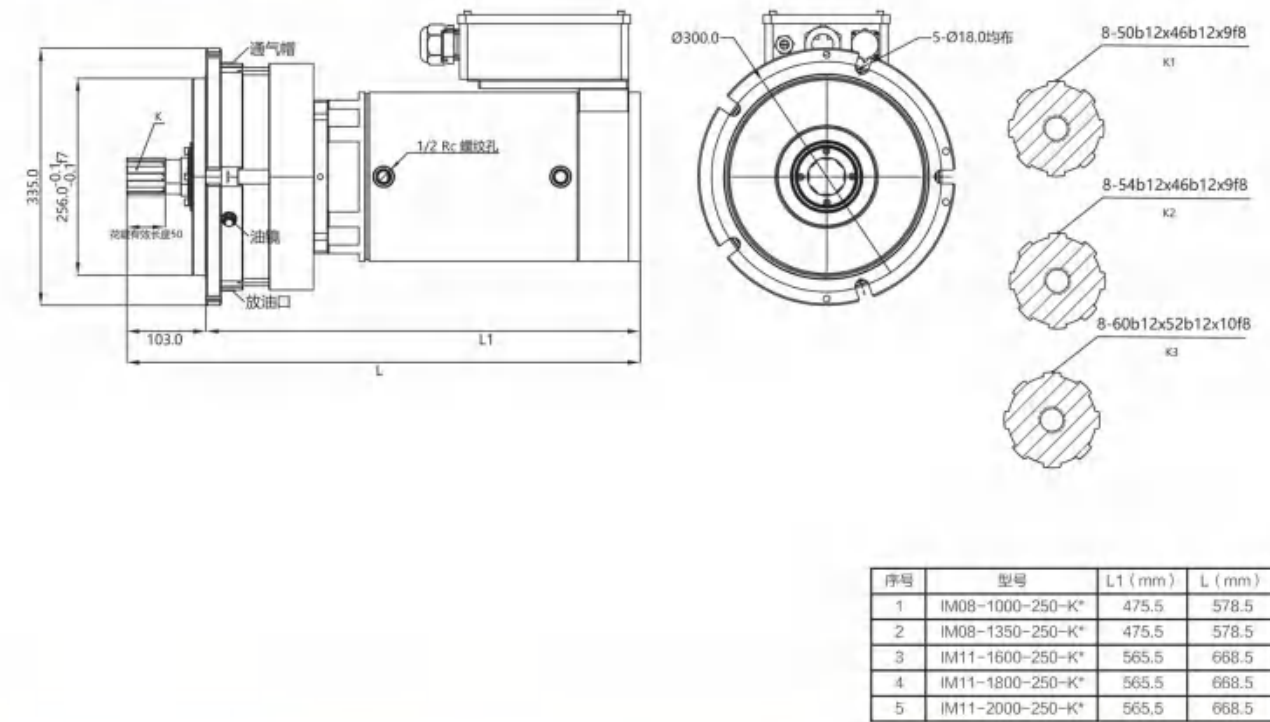


◆外形安装尺寸图（IM 16 系列）

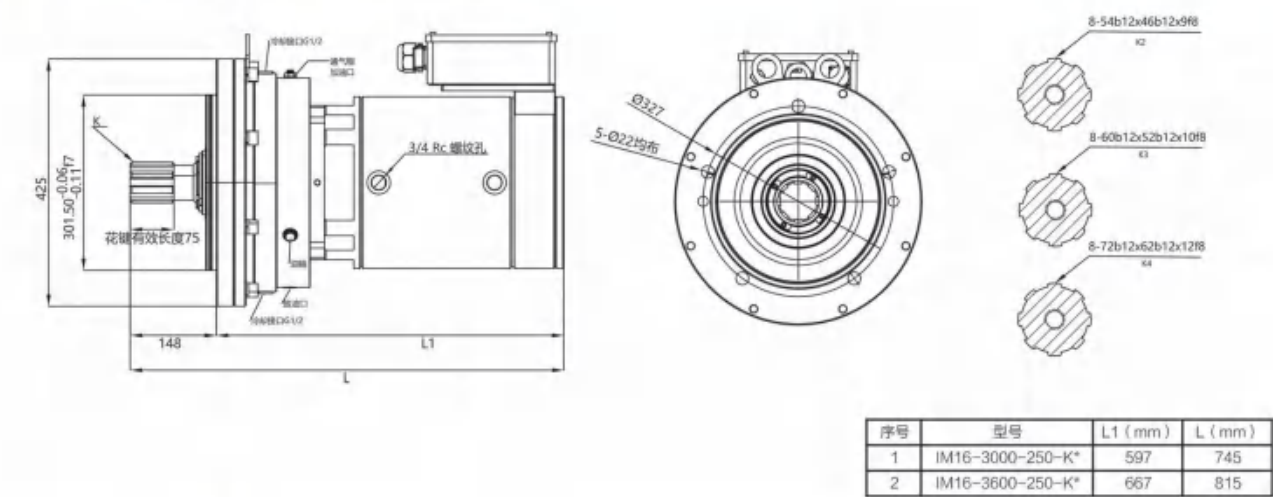


◆外形安装尺寸图（IM 470 系列）

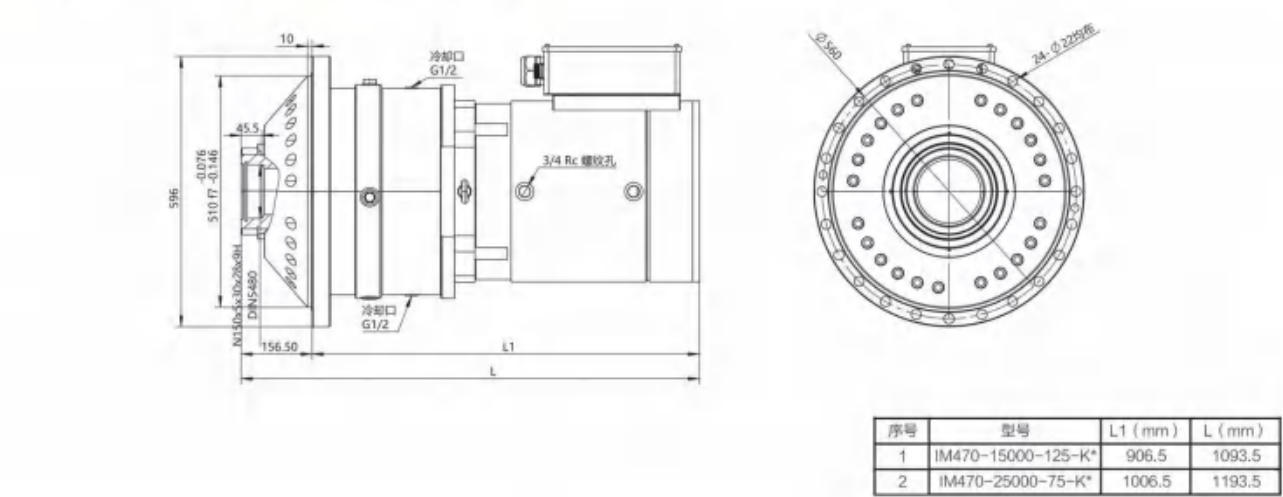


◆外形安装尺寸图（IM 31/31A 系列）

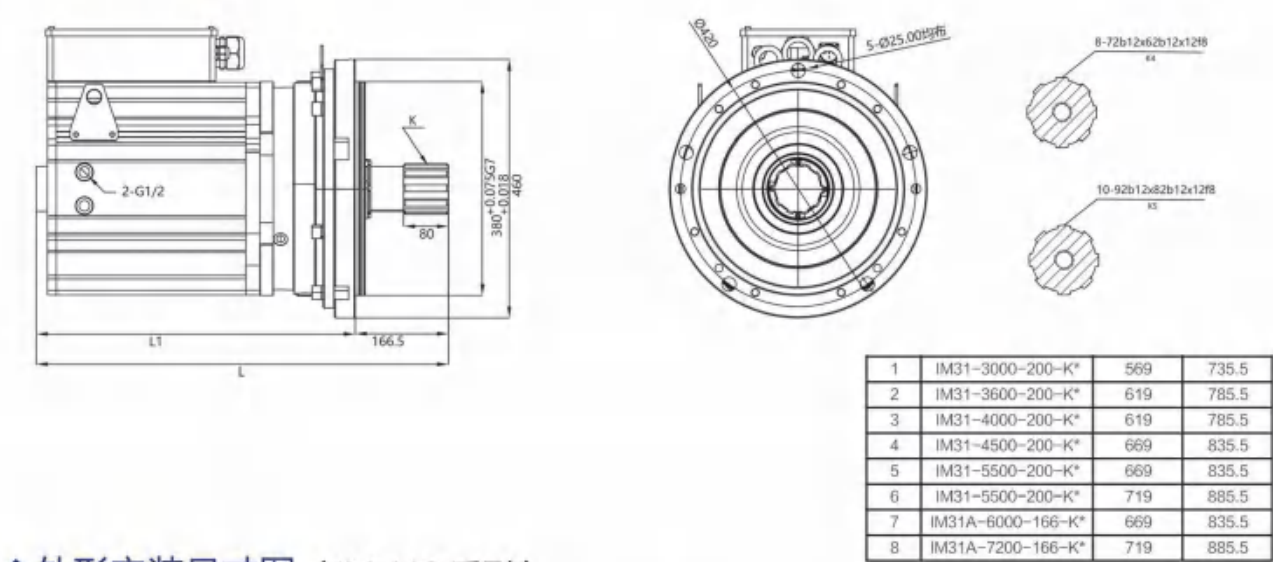

◆外形安装尺寸图（IM 510 系列）

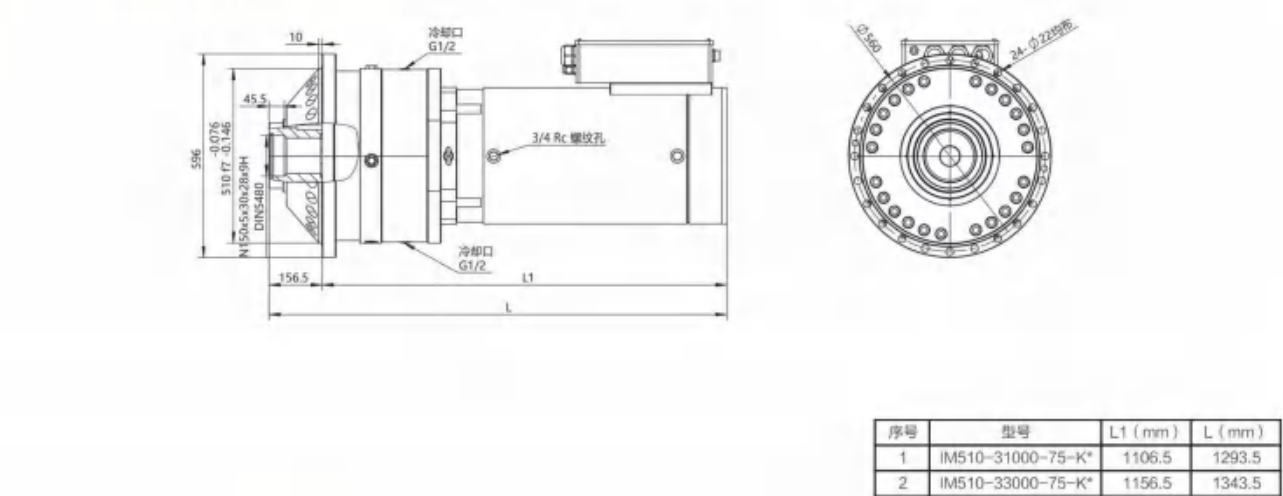

◆外形安装尺寸图（IM 410 系列）

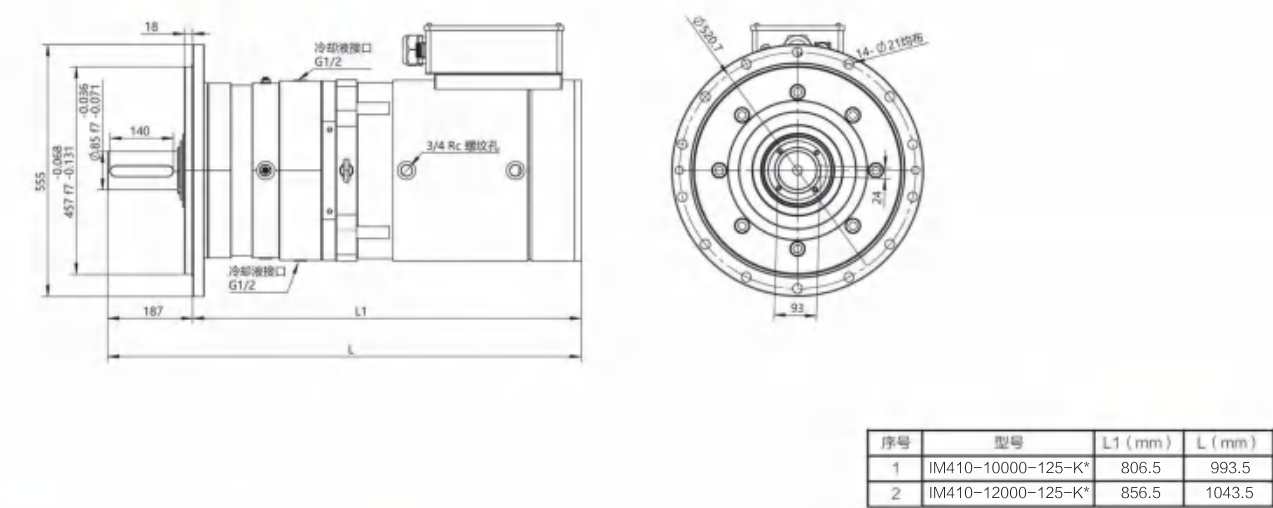

◆外形安装尺寸图（IM 565 系列）

